

H25B

Handheld PA with VHF Neckband Mic, USB & Bluetooth

Item ref: 952.412UK

User Manual



Version 1.0



Caution: Please read this manual carefully before operating
Damage caused by misuse is not covered by the warranty

Introduction

Thank you for choosing the Adastra H25B portable PA system. This all-in-one unit is designed to offer convenient and reliable portable amplification for a wide range of small public address applications. Please read this manual before using this equipment to avoid damage through incorrect operation and to get the best performance from your purchase.

Contents

Please take care when unpacking this product. Inspect for any damage and ensure you have the following components...

- H25B Handheld PA speaker unit
- VHF bodypack transmitter
- Neckband microphone
- Shoulder strap

Warning

To prevent the risk of fire or electric shock, do not expose any of the components to rain or moisture.

If liquids are spilled on any component, stop using immediately, allow unit to dry out and have checked by qualified personnel before further use.

Avoid impact or heavy vibration to any of the components, dropping the microphone can cause capsule failure.

No user serviceable parts inside transmitter or receiver except for battery/charging access - refer servicing to qualified service personnel.

Safety

- Ensure that mains supply voltage is correct for charging via the integral lead
- Avoid ingress of water or particles into the unit or bodypack transmitter
- Use alkaline or NiMH batteries in the transmitter and remove if unused for long periods.
- Observe the correct polarity when replacing batteries
- Do not attempt to charge USB devices from the type 'A' connector

Placement

- Keep all components out of direct sunlight and away from heat sources.
- Avoid impact or crushing of components
- Keep all components away from damp or dusty environments.


Cleaning

- Use a soft cloth with a neutral detergent to clean the outside of each component
- Lightly damp sterile wipes may be used on the microphone head for hygiene purposes
- To avoid damage, do not use solvents to clean the components

Specifications

Power supply: main unit	Mains or internal rechargeable battery
Power supply: VHF bodypack	3Vdc (2 x AA battery)
Output power: max	25W
RF carrier frequency	174.1MHz
RF power	10mW
Frequency response	100Hz - 12kHz
S/N ratio	>75dB
VHF operating distance	35.0m
VHF tuning stability	0.005% quartz crystal locked
FM radio tuning range	88 - 108MHz
Dimensions: VHF bodypack	100 x 65 x 35mm
Weight: VHF bodypack	68.2g (no battery)
Dimensions: main unit	155 x 183 x 285mm
Weight: main unit	2.74kg


Control panel

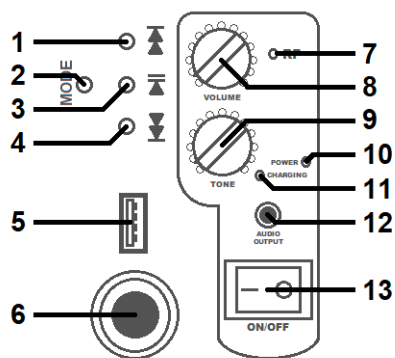

- 1 Next track (hold for volume up)
- 2 MODE (USB or Bluetooth)
- 3 Play / pause track
- 4 Previous track (hold for volume down)
- 5 USB type A socket
- 6 6.3mm microphone input
- 7 VHF indicator
- 8 VOLUME control
- 9 TONE control
- 10 POWER indicator
- 11 CHARGING indicator
- 12 3.5mm AUDIO OUTPUT
- 13 Power ON/OFF switch

Bodypack Transmitter

- 14 Slide switch – OFF/ON
- 15 Microphone input - 3.5mm threaded jack
- 16 Battery compartment



Operation

The H25B handheld PA unit can be operated from its internal rechargeable battery, which can be recharged by using the power lead that is stored inside the rear compartment. When connected to a mains outlet (ensuring correct voltage), the H25B operates from mains power when switched on (13) and charges the internal battery when switched off. Full charging from empty takes approximately 4½ hours.

An indicator LED (10) shows when power is on and another (11) shows when the battery is being charged. When not connected to the mains supply, the H25B is powered by the internal battery and should offer up to 8 hours operation from a full charge, depending upon the usage and output volume.

To operate the wireless microphone, open the front cover of the beltpack transmitter to reveal the battery compartment (16). (Open this by squeezing the sides inward and lever the flap forward).

Place 2 alkaline or NiMH AA batteries inside (ensure + and - are the correct way around) and then fold the front cover back into place until it clicks shut. Plug in the supplied neckband microphone and screw in the thread until fully connected (14). Slide the OFF/ON switch (15) to the ON position.

The built-in receiver in the H25B unit is controlled by 2 rotary controls on the control panel. When the VOLUME control (8) is turned fully off, the VHF receiver is powered down. Turning this control up activates the receiver and gradually increases the level. When the receiver detects the signal from the bodypack transmitter, the RF indicator (7) will illuminate. Adjust the VOLUME level to the required output.

Below the VOLUME control is a TONE (9) control for the wireless microphone. Turning the tone down can help avoid “squealing” feedback from excessive treble content or turning up will add more treble for clearer speech. Also, a wired microphone or wireless receiver may be connected to the MIC IN 6.3mm jack socket (6) to be used instead of, or in addition to, the built-in wireless set.

Care should be taken to avoid “line-of-sight” positioning of the H25B speaker and any microphones being used, which can cause feedback (howling or squealing caused by the microphone ‘hearing’ its own output through the speaker). Furthermore, the H25B should not be positioned too close to the microphone(s) being used for this same reason.

When the wireless microphone is not in use, turn down the OFF/ON/VOLUME control fully down to power down the VHF receiver and then switch off the bodypack transmitter. Remove the batteries if not being used for long periods.

A 3.5mm jack (10) can accept a wired input from any line level audio source, such as an mp3 or CD player. This input is always active, regardless of the media player mode and is not affected by the main VOLUME rotary control (8)

Media player

The H25B has an internal USB mp3 player, FM tuner and Bluetooth receiver, which are selected by pressing the MODE button (2)

Insert a USB drive with mp3 files stored on it to the USB A socket (5) to start playback. If playback does not start, press the MODE button repeatedly until it is in USB mode. Track navigation is controlled via buttons for Next Track, Play/Pause, Previous Track (1, 3, 4)

The FM tuner function is another option accessible by pressing the MODE button until a radio station can be heard. If no stations are tuned, there may be just white noise and the auto-tuning process will need to be completed first. To do this, press and hold the Play/Pause button (3) for 3 seconds and the auto-tuning process will start (the LED inside the USB port will flash more rapidly). The auto-tuning process may be stopped on a particular station by briefly pressing the Play/Pause button again. Once tuned in, stepping through the radio stations is possible using the Next Track and Previous Track buttons (1, 4).

The H25B also has an inbuilt Bluetooth receiver which can be activated by pressing the MODE button (2) to switch from USB mode to Bluetooth mode. Search for "LS101" device ID in your smart phone Bluetooth menu and select to pair to play tracks wirelessly from the smart phone to the H25B. An audible notification is played when a smart phone or other sending device is connected. Once paired, the device can be automatically re-connected when the H25B is in Bluetooth mode and the device is within reception range. Track navigation is controlled via buttons for Next Track, Play/Pause, Previous Track (1, 3, 4)

In any of the Bluetooth, USB or FM modes pressing and holding the Next Track and Previous Track buttons (1, 4) will increase or decrease the output level of the media player.

Troubleshooting

"POWER/CHARGING" LED not lit when using mains power	Check for correct voltage and that outlets are switched on Check if mains fuse has blown
"POWER/CHARGING" LED not lit when using battery power	Check POWER switch is switched on Battery may be fully discharged, connect to mains if available
"POWER/CHARGING" LED is on, but "RF" LED is not lit	Ensure transmitter is switched ON with a good battery installed Check that bodypack transmitter is not out of reception range Check that VHF OFF/ON/LEVEL control is not switched off
"POWER/CHARGING" and "RF" LEDs are lit but no mic output	Check if bodypack transmitter switch is in OFF position Check if neckband microphone is properly connected to bodypack Ensure transmitter has good / charged batteries Check if there is another nearby transmitter with the same frequency
Microphone output is very loud or distorted	Turn down LEVEL control on bodypack transmitter Turn down OFF/ON/LEVEL control on the H25B to a reduced level
Microphone output is very low	Turn up LEVEL control on bodypack transmitter Turn up OFF/ON/LEVEL control on the H25B Check transmitter batteries
USB player will not play audio files	Check that file type is standard mp3 format Check USB memory device on different equipment to ensure working properly Press PLAY button or jump to other tracks to make sure file is not corrupt Remove and replace USB device to check if connected properly
USB player output very low	Press and hold the VOL + button to increase volume level Check that audio file is not recorded at a very low gain level - if so, correct this on a PC/Mac
USB player output very high or distorted	Press and hold the VOL - button to decrease volume level Check that audio file is not recorded at a very high gain level - if so, correct this on a PC/Mac
No playback through Bluetooth	Ensure that the smart phone is connected to "LS101" device in the Bluetooth menu Ensure that the volume on the smart phone (or another sending device) is turned up



Disposal: The "Crossed Whee Bin" symbol on the product means that the product is classed as Electrical or Electronic equipment and should not be disposed with other household or commercial waste at the end of its useful life. The goods must be disposed of according to your local council guidelines.

Hereby, AVSL Group Ltd. declares that the radio equipment type 952.412UK is in compliance with [Directive 2014/53/EU](https://eur-lex.europa.eu/legal-content/EN/TXT/?uri=CELEX:32014L0053)

The full text of the EU declaration of conformity for 952.412UK is available at the following internet address:
<http://www.avsl.com/assets/doc/9/5/952.412UK.pdf>

*Errors and omissions excepted. Copyright© 2020. AVSL Group Ltd.
Unit 2-4 Bridgewater Park, Taylor Rd. Manchester. M41 7JQ*