

Product type                      Adapter  
\_\_\_\_\_


Product NO.                      SAC3MM  
\_\_\_\_\_

Customer  
\_\_\_\_\_

	APPROVAL	AUDIT	COMPILE
Manufacturer			

	APPROVAL	AUDIT	ACCEPT
(Customer)			

## Product Appearance

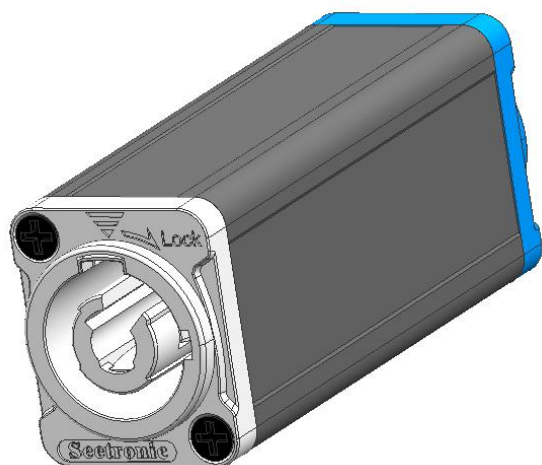

## Product features

- ✔ (Quick, simple locking system)
- ✔ (Connect reliably)
- ✔ (Small size of product)

## (Technical parameters)

### 1. (Electrical parameters)

(Contacts NO.)	2+PE
(Rated current)	20A
(Rated voltage)	250V AC
(Contact resistance)	$\leq 5\text{m}\Omega$
(Dielectric strength)	4000V DC
(Insulation resistance)	$> 1000\text{M}\Omega$

## 2. Mechanical parameters

(Service life)	> 1000
(Locking device)	Quick Lock

## 3. Material and environmental parameter

(Shell)	Aluminum
(Contacts)	Cu alloy
(Contact surface)	Ag
(Locking element)	Steel Ck67
(Flame-retardant grade)	UL94-V0
(Temperature range)	-30°C to +80°C

## 4. Standard

(Standard)	IEC61984
------------	----------

### (Product Profile)

