

SLIM 1024



Wall mounted USB to DMX Stand Alone Interface



FREE SOFTWARE & APPLICATION DOWNLOAD

The SLIM Stand Alone interface provides a wall-mounted solution designed for indoor installations and projects requiring a user-friendly and aesthetically-pleasing lighting control panel.

Easily mounted on any surface, the control panel fits standard European and US wall plugs.

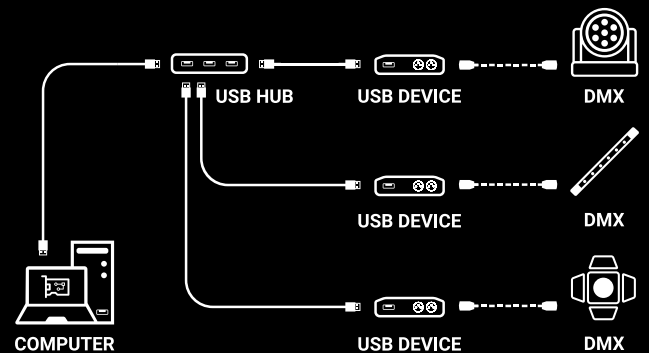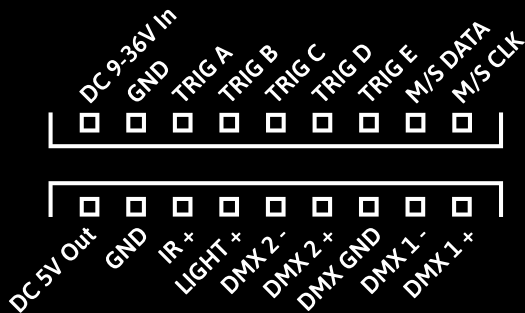

HARDWARE Features

| | |
|------------------------|--|
| DMX Output | 1024 In/Out channels PC and Stand Alone |
| Multiple Zone | 5 Zones, play up to 5 different scenes/sequences at time in Stand Alone |
| Memory | Micro SD Card (all FAT format, up to 256 GB) + Internal memory (No SD card required) |
| DMX Modes | DMX In/Out, DMX Splitter, DMX Merge, DMX Record, DMX Trigger |
| Stand Alone Options | 6 selectable modes: Buttons (8), Pages (10), Zones (5), Colour (99 RGB + 8 RGBW), Commands from the Contacts (speed, scene, dimmer, zone) Time Clock setting adjustable in Stand Alone. 16-bit and fine channel management Automatic Scene Recovery if the power is cut off Cross Fade time between scenes Turn Off display after 4s., Default start scene, Dimmer and RGB color selection Master/Slave mode with Up to 32 devices combined and synchronized (64 universes) |
| Triggers (Stand Alone) | 8 buttons with blue status LED, 10 Pages Real Time Clock and calendar for each scene (Hour, Day, Week, Month, Year) 5 Dry Contacts on 3-5V (On, On/Off, Release, Restart, Scene Priority, 31 contacts max) DMX input (DMX signal from another DMX device) Infrared Remote, Light intensity (with optional deported PCB and remote) |
| Max DMX outputs (USB) | x12 USB interfaces connected = 24 DMX max |
| Power | 5V DC (USB), 5V to 24V - 0.2A (screw connector), 0.2W, High Voltage Protection |
| Dimension | H: 1.9 cm ; W: 12.7 cm ; L: 11 cm ; 0.2 Kgs (WALL-MOUNTED) |
| Housing | Black or White ABS Plastic with mounting slots |
| I/O Connectors | Mini USB 2.0, Screw Terminal block 2x9 Pins |
| Operating Temperature | -40 to +85 C° |
| IP Rating | IP40 |
| Certifications | CE, LVD, RoHS |
| International Warranty | 5 years |



SOFTWARE Features

| | |
|------------------------|--|
| PRO DMX 2 | Yes |
| LED Player | Up to 64x512 DMX Outputs |
| Pro DMX | 30 minutes Audio and Video Timeline |
| Studio DMX | 3D viewer in real time, Full mode |
| Wi-Light 2 APP | Mobile software control (Android, iOS) |
| Art-Net Output from PC | 2x512 DMX Outputs per connected device |
| System Compatibility | Windows, iOS, Linux |
| Technical support | Worldwide, English, French, Chinese |

Mobile minimum configuration:

Android 5 / iOS 10 and +
1Ghz CPU, 1 Gb RAM, 60 Mb disk

Configuration minimale PC:

Windows, Mac OS, Linux (32 and 64 bits)
2Ghz CPU (2 cores), 8 Gb RAM
2Gb RAM graphic card (for 3D only)
600 Mb disk, 1920x1080 resolution
1 USB port (Device)
1 Ethernet Port (for Art-Net & sACN)

Software & App download:

Software package download: <https://chromateq.com/dmx-software-downloads/>

191 Allée de Lauzard
34980 St Gély du Fesc, FRANCE
Web: www.chromateq.com
Email: info@chromateq.com
Phone: +33 952210755
Wechat: Chromateq
WhatsApp: +8613422062209
QQ: 2908265661



www.chromateq.com - Support • Download