




TEST REPORT IEC 60529 Degrees of protection provided by enclosures (IP code)	
Report reference No..... :	R-Nr. 15-IK-00XX.U0x
Tested by : (printed name and signature)	M. Huber
Approved by..... : (printed name and signature)	R. Egger
Date of issue	2016-01-18
Total number of pages	9
CB Testing Laboratory	Electrosuisse
Address	Luppmenstrasse 1, 8320 Fehraltorf SWITZERLAND
	 
Applicant's name	Neutrik AG
Address	Im alten Riet 143 9494 Schaan, LIECHTENSTEIN
Test specification:	
Standard	IEC 60529:13 (edition 2.2)
Test procedure	Expert's test according to EN 60-1XX
Non-standard test method..... :	
Test Report Form No..... :	IEC60529
Test Report Form(s) Originator	Electrosuisse
Master TRF	Dated 2014-11
Electrosuisse. All rights reserved.	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Electrosuisse is acknowledged as copyright owner and source of the material. Electrosuisse takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
General remarks	
This report shall not be reproduced except in full without the written approval of the testing laboratory. This test report is not valid as a Test Report according to a MRA (example CCA, ENEC, Keymark) or a private scheme (example SEV system no. 5) unless appended to a corresponding certificate issued by a participating or authorized certification body, in accordance with the rules of the MRA or the private scheme.	
Test item description	
Trade Mark..... :	Neutrik
Manufacturer	Neutrik AG Im alten Riet 143, 9494 Schaan, LIECHTENSTEIN
Model/Type reference	NE8FDX-P6-W, NE8FDX-Y6-W
Ratings	---

Test items particulars:

Degree of protection :

IP x5

Test case verdicts

Test case does not apply to the test object :

N/A

Test item does meet the requirement :

Pass

Test item does not meet the requirement :

Fail

Test case not checked :

Testing

Date of receipt of test item :

2016-03-01

Date(s) of performance of test :

2016-03-01

Sample provides protection of IP

Copy of marking plate

IEC 60529			
Cl.	Requirement	Result	Verdict
5	DEGREE OF PROTECTION AGAINST ACCESS TO HAZARDOUS PARTS AND AGAINST SOLID FOREIGN OBJECTS		
	Test condition see Clause 12+13		

6	DEGREE OF PROTECTION AGAINST INGRESS OF WATER		
	Test condition see Clause 14		

10	MARKING		
	The requirements for marking shall be specified in the relevant product standard.		
	Where appropriate, such a standard should also specify the method of marking which is to be used when:		
	- one part of an enclosure has a different degree of protection to that of another part of the same enclosure;		N/A
	- the mounting position has an influence on the degree of protection;		N/A
	- the maximum immersion depth and time are indicated.		N/A

12	TEST FOR PROTECTION AGAINST ACCESS TO HAZARDOUS PARTS INDICATED BY THE FIRST CHARACTERISTIC NUMERAL		
12.2	Test condition:		
12.2	IP 0X: non protection: no test request		
12.2	Acceptance conditions for first characteristic numerals		
	Sample no.	1	

IEC 60529			
Cl.	Requirement	Result	Verdict
	IP 1X: Against solid foreign objects of 50mm diameter and greater. The sphere of 50mm diameter shall not fully penetrate and adequate clearance shall be kept. Force 50N	not checked	--
	IP 2X: The jointed test finger of 12mm diameter, 80mm length, shall have adequate clearance from hazardous parts. Force 10N	not checked	--
	IP 3X: Against solid foreign objects of 2.5mm diameter and greater. The test rode of 2.5mm diameter shall not penetrate. Force 3N	not checked	--
	IP 4X: Against solid foreign objects of 1mm diameter and greater. The object probe of 1.0mm diameter shall not penetrate. Force 1N	not checked	--
	IP 5X: Against solid foreign objects of 1mm diameter and greater. The object probe of 1.0mm diameter shall not penetrate. Force 1N	not checked	--
	IP 6X: Against solid foreign objects of 1mm diameter and greater. The object probe of 1.0mm diameter shall not penetrate. Force 1N	not checked	--

13	TEST FOR PROTECTION AGAINST SOLID FOREIGN OBJECTS INDICATED BY THE FIRST CHARACTERISTIC NUMERAL		
13.2	Test condition:		
13.1	IP 0X: non protection: no test request		
13.3	Acceptance conditions for first characteristic numerals.		
	IP 1X: Against solid foreign objects of 50mm diameter and greater. The sphere of 50mm diameter shall not fully penetrate. Force 50N	not checked	--
	IP2X: Against solid foreign objects of 12.5mm diameter The sphere of 12.5mm diameter shall not fully penetrate. Force 30N	not checked	--
	IP 3X: Against solid foreign objects of 2.5mm diameter and greater. The test rode of 2.5mm diameter shall not penetrate at all. Force 3N	not checked	--
	IP 4X: Against solid foreign objects of 1mm diameter and greater. The object probe of 1.0mm diameter shall not penetrate at all. Force 1N	not checked	--

IEC 60529			
Cl.	Requirement	Result	Verdict
13.5.2	IP 5X: Dust protected. Ingress of dust is not totally prevented, but dust shall not penetrate in a quantity to interfere with satisfactory operation of the apparatus or to impair safety.	not checked	--
	- with or without depression.	not checked	--
	- depression max.: (max. 20mbar)	not checked	--
	- test time : (time: <8h, when 80x volume)	not checked	--
13.6.2	IP 6X: Against ingress of solid foreign object: dust-tight	not checked	--
	- depression max.: (max. 20mbar)	not checked	--
	- test time : (time: <8h, when 80x volume)	not checked	--

14	TEST FOR PROTECTION AGAINST WATER INDICATED BY THE SECOND CHARACTERISTIC NUMERAL		
14.1	IP 0X: non protection: no test request		
14.2	Test condition:		
	Ambient temperature:	20.5°C	Pass
	Water temperature:	21.2°C	Pass
14.2.1	IP X1: Vertically falling drops shall have no harmful effects.		Pass
14.2.2	IP X2: Vertically falling drops shall have no harmful effects. Enclosure ist tested of four fixed positions of tilt. These positions are 15° on either side of the vertical in two mutually perpendicular planes.		Pass
14.2.3	IP X3: Water sprayed at an angle of 60° on either side of the vertical shall have no harmful effect.		Pass
14.2.4	IP X4: Water splashed against the enclosure from any direction shall have no harmful effect.		Pass
14.2.5	IP X5: Water projected in jets against the enclosure from any direction shall have no harmful effect.		Pass
14.2.6	IP X6: Water projected in powerful jets against the enclosure from any direction shall have no harmful effect.		N/A
14.2.7	IP X7: Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time:		N/A

IEC 60529			
Cl.	Requirement	Result	Verdict
14.2.8	IP X8: Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under conditions of which shall be agreed between manufacturer and user but which are more severe than for numeral 7		N/A
14.2.9	IP X9: Water of 80 °C ± 5 °C projected in high pressure jets against the enclosure shall have no harmful effect.		N/A
14.3	Acceptance conditions:		
	dielectric strength test		N/A
	In general, if any water has entered, it shall not:		
	- be sufficient to interfere with correct operation of the equipment or impair safety	No water inside the housing	Pass
	- deposit on insulation parts where it could lead to tracking along the creepage distances		Pass
	- reach live parts or windings not designed to operate when wet		Pass
	- accumulate near the cable end or enter the cable if any		Pass

15	TEST FOR PROTECTION AGAINST ACCESS TO HAZARDOUS PARTS INDICATED BY THE OPTIONAL LETTERS (acc. to clauses 7,8)		
15.3	IP XXA: Against access to hazardous parts with: the back of the hand		N/A
	IP XXB: Against access to hazardous parts with: a finger		N/A
	IP XXC: Against access to hazardous parts with: a tool		N/A
	IP XXD: Against access to hazardous parts with: a wire		N/A
	IP XXXH: Supplementary information specific to: High-voltage apparatus		N/A
	IP XXXM: Supplementary information specific to: Motion during water test		N/A
	IP XXXS: Supplementary information specific to: Stationary during water test		N/A
	IP XXXW: Supplementary information specific to: Weather conditions		N/A

IEC 60529

Photo-documentation

IP test's



Sample after the test with connector inserted.




Connector removed. No water inside



No water on the backside or inside the box.

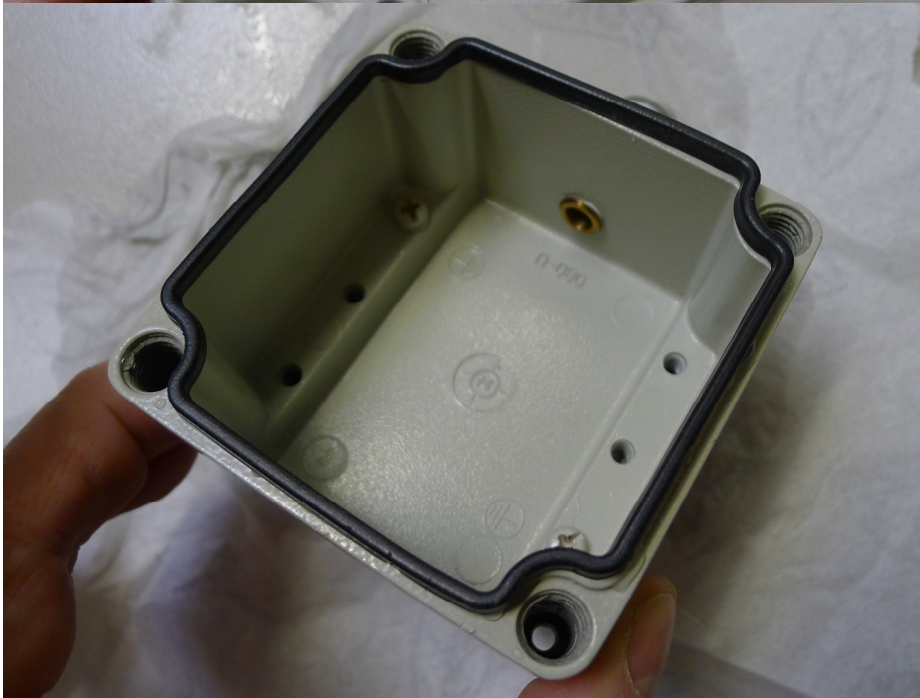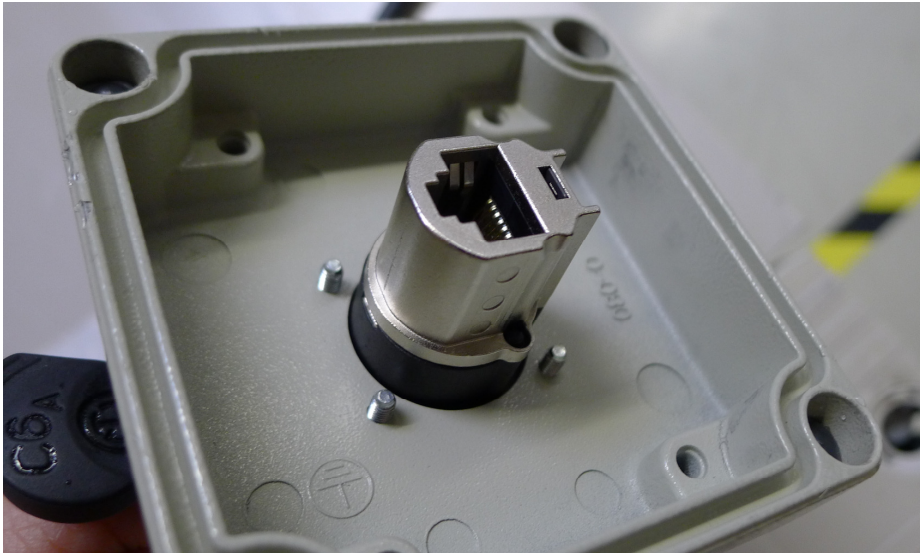

No water in the connector

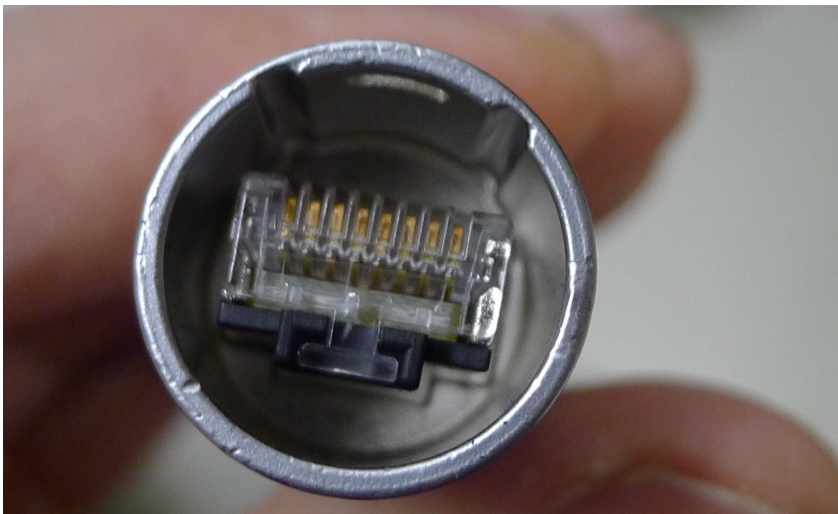

Test with closed lid. After opening the lid, no water inside the socket.



No water in the box.

