



**G007NT, G007NV
Mirror ball motors**



**For mirror balls up to 3kg Mains powered
Pre-drilled for mirror-ball attachment Quiet
operation**

IMPORTANT

Installer and Users please note:

These instructions should be read carefully and left with the user of the product for future reference.

BEFORE USE

You must inspect the product including its cable and plug for any signs of damage. If the product is damaged, DO NOT use it, and contact your supplier immediately.

PRODUCT SAFETY


- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- For indoor use only.
- Do not use in bathrooms, or in wet or damp locations.
- Do not place the mains lead beneath a carpet or rug.

INSTALLATION

Before installation, verify that the ceiling to which the product will be fixed will support the weight of the motor and the mirror ball. The maximum working load of this product is 3 kg. Attach the motor to the ceiling using three 4 mm diameter screws. Make sure that the mounting flange is completely horizontal. Attach the mirror ball to the motor shaft using appropriate fixings. Plug the mains lead into a 13 Amp mains socket. If connecting via an extension lead, make sure that the lead is rated at 3 Amps or more, and that it is fully unwound. Alternatively, remove the plug and connect permanently to a fused spur or a ceiling rose. This must be done by a qualified electrician. Because of the minimal current requirement (<20 mA) the motor may be connected to a lighting circuit. This would allow the mirror ball motor to be switched along with the lamps that are illuminating it. This could be done using a fused spur or a 5A plug and socket

complying with BS 546. Do not connect the mirror ball motor to the output of a dimmer. It is not possible to vary the speed of the motor.

MAINTENANCE

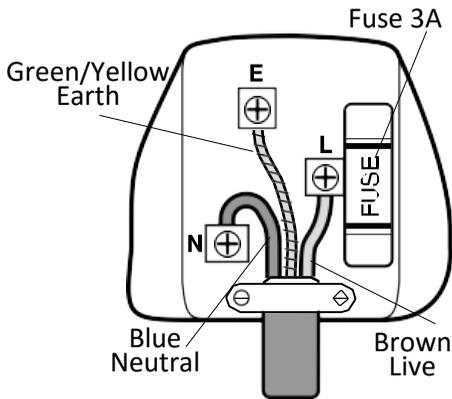

If the mains lead is damaged, it must be replaced by the manufacturer or an authorised service centre. If the mains plug needs to be replaced, proceed as follows:

- Connect the brown wire to the terminal labelled "L".
 - Connect the blue wire to the terminal labelled "N".
 - Connect the green/yellow wire to the terminal labelled "E" or with the earth symbol.
- Make sure that the cord-grip is positioned correctly (over the outer sheath of the cable) and is fully tightened. If the plug is supplied with a 13A fuse, replace it with a 3A fuse.

PERIODIC SAFETY INSPECTION

The mirror ball, the motor and suspension chain should be inspected regularly to make sure that it is not becoming loose and likely to fall.

PAT TESTING

When used in a workplace, this product should be safety-tested yearly by a qualified electrician (PAT Tested).

We recommend that it is PAT tested regularly when used in a domestic environment.

GENERAL SAFETY REQUIREMENTS

Domestic wiring must be tested periodically by a qualified electrician at least once every 10 years or at every change of occupancy.

For office and retail premises, and buildings such as village halls, the wiring must be inspected at least once every 5 years.

It is recommended that all buildings be fitted with smoke alarms (it is mandatory for new buildings).

TECHNICAL SPECIFICATION

Diameter:	110mm
Height:	55 mm
Suspension chain:	150mm
Weight:	0.2 kg
Maximum working load:	3kg
Speed: G007NT:	2 rpm
G007NV:	1 rpm
Power supply:	230 V ~ 5 VA

SERVICE WARRANTY

Electrovision guarantees the product free from defects in materials and workmanship for a period of twelve months.

Should this unit be operated under conditions other than those recommended, or any attempts made to service or modify the unit, then the warranty will be rendered void.

The product you buy may sometimes differ slightly from illustrations. This warranty is in addition to, and does not affect, your statutory rights.

If you have any problems with this product, please call our Help Desk on (0845) 4594816.

Electrovision Ltd.,
Lancots Lane, Sutton Oak,
St. Helens, Merseyside.
WA9 3EX

website: www.electrovision.co.uk

DISPOSAL AND RECYCLING

You must not dispose of this appliance with domestic household waste. Most local authorities have specific collection system for appliances and disposal is free of charge to the end-user.

When replacing an existing appliance with a similar new appliance your retailer may take the old appliance for disposal.