AU-D2
Digital Coax & Optical Audio Converter



The AU-D2 is a versatile digital audio converter, either coaxial to optical or optical to coaxial. Simply select one of the digital audio inputs for two identical audio signals in both output formats.

PANELS




Front



Rear

DIAGRAM

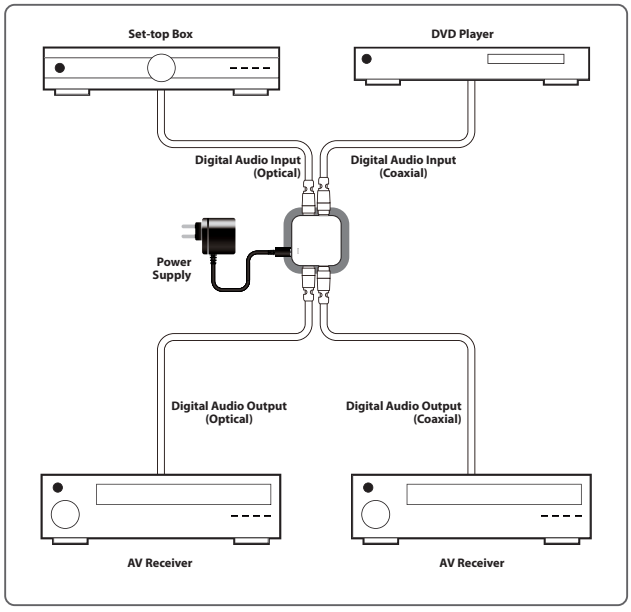

FEATURES

- Digital audio Coaxial/Optical bi-directional converter
- Two-way conversion; Coaxial to Optical or Optical to Coaxial
- Re-clocking function enables the use of extended cable distances
- Inputs accept audio signals from 2-channel PCM to 5.1. Output signal follows input signal
- Select between input ports, and distribute the audio signal to both Coaxial and Optical output ports simultaneously

SPECIFICATIONS

Interfaces

Input Port	1×Coaxial (RCA connector) 1×Optical Fiber (TOSLINK connector)
Output Port	1×Coaxial (RCA connector) 1×Optical Fiber (TOSLINK connector)

Power

Power Supply	5 V/1.2 A
Power Consumption	0.7W

Enclosure

Chassis Material	Plastic
Chassis Colour	Black
Dimensions (W×H×D)	58 mm × 24 mm × 46 mm
Weight	25g

ORDERING INFORMATION

Model No.	Product Description
AU-D2	Digital Coax & Optical Audio Converter