

Lucenti




PixlStripOne

- RGBW OUTDOOR IP66 LEDS,
FULL SILICONE COATING
- WHITE 6000K
- PIXELBUS TECHNOLOGY
- PIXEL (6 LEDS) CONTROLLED OVER LUCENTI
PIXLCONVERTER
- AUTO ADDRESS AND PIXEL COUNT FUNCTION
- UP TO 20M COMBINED ON A SINGLE
PIXLDRIVE1 OR PIXLDRIVE8PRO OUTPUT
(200W) WITH 1 PIXLCONVERTER
- INTERCHANGEABLE CLIP-ON PMMA OPAQUE
OR STEALTH FILTERS ON THE BLACK LUCENTI
ALUMINIUM PROFILE FOR PIXLSTRIPONE
LU-PSMP
- UP TO 60M CABLE DISTANCE BETWEEN
PIXLDRIVE AND LAST LED

SPECS

LENGTH OPTIONS	120CM / 240CM / 480CM / 960CM
LED COUNT	120CM 60 LEDS
PIXEL COUNT	120CM 10 PIXELS (6 LEDS ARE 1 PIXEL)
VOLTAGE	24V
WATTS	1,2M: 12,50W - 1M: 10,4W
COLOR	RGBW
BENDING RADIUS	VERTICAL 30MM MAX. HORIZONTAL NOT BENDABLE

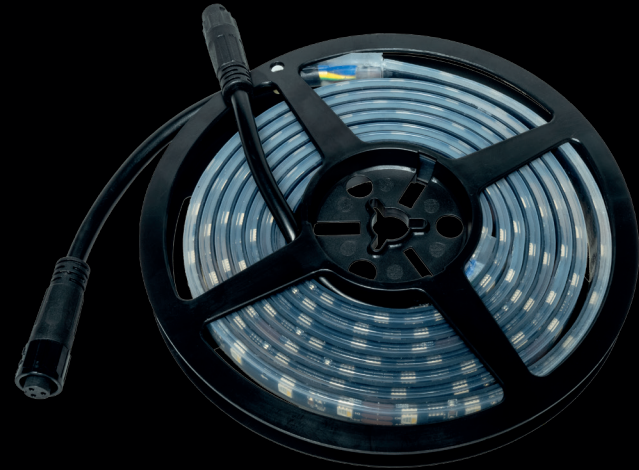

Lucenti

SAVVY LIGHTING

LUCENTI.LIGHTING • INFO@LUCENTI.LIGHTING • LIGHTS FROM BELGIUM