




ENCORE PROFILE PRO COLOR

250W RGBWAL LED Ellipsoidal

The Encore Profile Pro Color™ Ellipsoidal features a 250W RGBWAL (Red, Green, Blue, White, Amber, Lime) LED engine, >90CRI with 14°, 19°, 26°, 36°, and 50° interchangeable lens options (sold separately), (4) blade manual framing shutters, manual focus, supports B size metal HT transparency gobos, DMX controlled electronic strobe, dimming, dimming curves and dimming modes, flicker free operation for TV and FILM, adjustable refresh rate frequency, locking 5-pin XLR In/Out connectors and Locking Power Input, (4) button LCD control display panel, an integrated rigging yoke, quiet fan cooling, and a multi-voltage universal auto switching power supply (AC100-240v).

Since its availability, this LED ellipsoidal has been very popular with new or upgraded installations in houses of worship because of its vast color range and an independent dynamic white fader to achieve white color temperatures from 2500K to 10,000K.

www.ADJ.com/encore-profile-pro-color

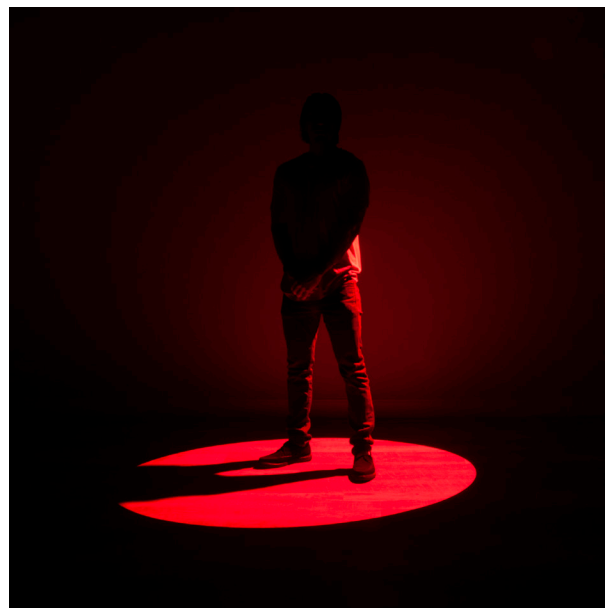

ENCORE PROFILE PRO COLOR



Source:

- 250W RGBWAL (Red/Green/Blue/White/Amber/Lime) LED Engine
- 50,000 Hour Average LED Life (LED Life may vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming).

Photometric Data:

- >90CRI 6,000 Total Lumens (with 26° lens)

Effects:

- Electronic Strobe and Dimming
- Variable Dimming Curves and Dimming Modes

GOBOs:

- Supports "B" Size Metal, HT Transparency Gobos
- GOBO Holder is included
- GOBOs are sold separately

Control / Connections:

- 5 DMX Channel Modes (2/4/13/14/16)
- Adjustable Refresh Rate (900-1500, 25,000 Hz)
- 4-button Control Panel
- LED Menu Display
- Locking 5-pin XLR Connector In/Out
- Locking Power Connector In/Out
- With Wired Digital Communication Network

Size / Weight:

- Length: 26.9" (683mm) (Lens In)
- Width: 11.4" (289mm)
- Vertical Height: 17.7" (450mm)
- Weight: 20.0 lbs. (9.1 kg)

Electrical / Thermal:

- Quiet Fan Cooling
- AC 100-240V - 47/63Hz
- 250W Max Power Consumption
- Power Linking: 3pcs Max @120V / 8pcs Max @240V
- 14° to 113°F (-10° to 45°C)

Approvals / Ratings:


- CE | cETLus (Pending) | IP30

Included Items:

- One locking power cable



250W RGBWAL LED ENGINE

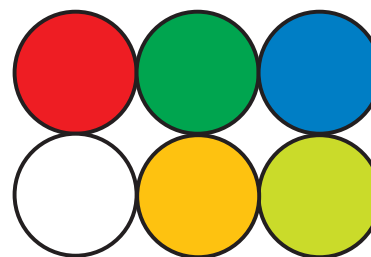

RED / GREEN / BLUE
WHITE / AMBER / LIME



ENCORE PROFILE PRO COLOR



EP LENS 14



EP LENS 26



EP LENS 50



LENS OPTIONS



EP LENS 19



EP LENS 36



Optional Accessories:

- EP Lens 14 (14° Lens)
- EP Lens 19 (19° Lens)
- EP Lens 26 (26° Lens)
- EP Lens 36 (36° Lens)
- EP Lens 50 (50° Lens)

FEATURES VIDEO

