

Product Type		IP67 Combined Waterproof Power Socket		
Product Model	SAC3PX	SAC3PX-67		
Customer Nam	e			
	Prepared	Checked	Approved	
Manufacturer	·			
Customer	Received	Checked	Confirmed	



Product Type	IP67 Combined Waterproof Power Socket
Product Model	SAC3PX-67



Product Features

- The combination of SAC3MPX-67 and SAC3FPX-67 which saves space while making the equipment looks nicer.
- > Durable and ruggedly sealed power connector used for electrical connection under outdoor conditions with protection grade IP67.
- It can achieve the effects of waterproof and airproof at the same time.
- The rubber cover with model number CNAC-PX-67 is not included.



Electrical Parameters

Item	Specification
Number of Contacts	2 + PE
Rated Current	16A VDE (20A UL)
Rated Voltage	250V AC VDE (300V AC UL)
Contact Resistance	≤ 5 mΩ
Dielectric Strength	4000V DC (1600V/min AC UL)
Insulation Resistance	> 1000 MΩ

Mechanical Parameters

Item	Specification
Service Life	> 1000 mating cycles
Cable Size	2.5 mm ² (12AWG)
Type of Terminals	Soldering / plugging 6.3 terminals
Screw fixing torque	0.5 Nm



Material and Environmental Parameters


Item	Specification
Housing	PA
Contacts	Cu alloy
Contact plating	Au
Flame-retardant grade	UL 94 V0
Protection class	IP67
Temperature range	-30°C ~ +80°C

Standards and Certifications

Standards	UL498 UL50E IEC61984 GB/T 34989
Certifications	UL: E356932 VDE: 40044166 CQC23003410681
Solderability	IEC 68-2-20



Product Drawing

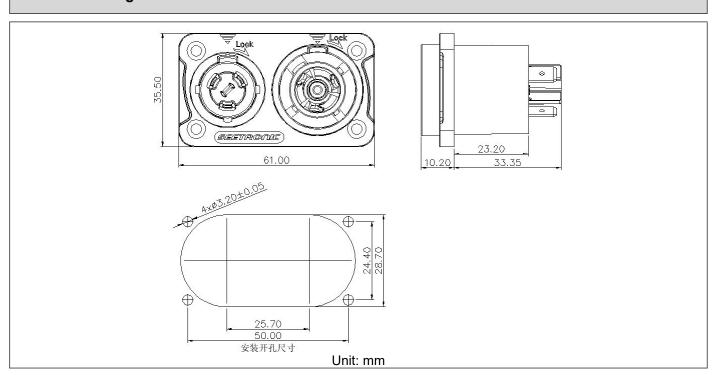

Packaging Method

Blister box packaging (only include the socket body, waterproof rubber is not included and need to be purchased separately)

10 pcs per blister box, 40 pcs per inner carton, 5 inner carton per master carton (200 pcs per master carton)

Accessory

✓ No accessories

Screws and Nuts

- □ Back fastener plate
- □ Other