

RJ45 PI	ng	
SE8FC-E	3	
e		
Prepared	Checked	Approved
	<u>I</u>	
Received	Checked	Confirmed
	SE8FC-E	Prepared Checked



Product Type	RJ45 Plug	To our
Product Model	SE8FC-B	

Product Features

- Match with SE8MC-02-NEW for connecting cables and enabling aerial docking during mating
- Ideal for any harsh and demanding outdoor environment with waterproof rating IP65
- Cable connector carrier does not include RJ45 plug
- Cable OD 5-7 mm
- > Sturdy die-cast shell and unique cable clamp
- ➤ Complies with CAT5e according to TIA/EIA 568B and ISO/IEC 11801 standard



Product Parameters

Item	Specification
Connection type	RJ45
Gender	Female

Electrical Parameters

Item	Specification
Contact resistance	≤ 10 mΩ
Dielectric strength	1 KV DC
Insulation resistance	≥ 0.5 GΩ
Rated current	1.5 A
Rated voltage	50 V
Frequency range	1 - 100 MHz
Transmission performance	CAT5e



Mechanical Parameters

Item	Specification
Cable OD	5-7 mm
Insertion force	≤ 20 N
Withdrawal force	≤ 20 N
Service life	> 1000 mating cycles

Material and Environmental Parameters

Item	Specification
Boot	PA
Housing	Zinc alloy
Housing plating	Black plating
Contacts	Cu alloy
Contact plating	Au
Flame-retardant grade	UL 94-V0
Protection degree	IP65
Temperature range	-30°C ~ +80°C


Standards and Certifications

Standards	TIA/EIA 586B, IEC11801





Product Drawing

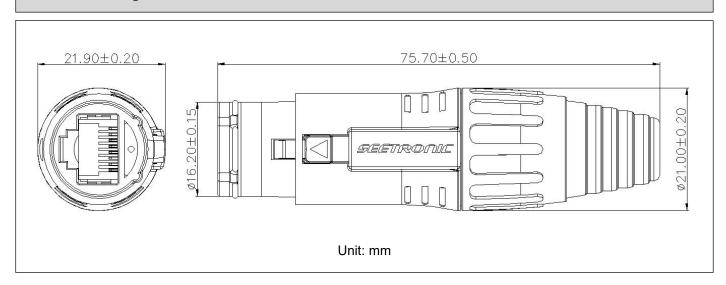

Packaging Method

PE bag packing: 1 pc housing per PE bag, 80 pcs boot per PE bag, 80 pcs cable clamp per PE bag 80 pcs housing + 1 bulk packed boot + 1 bulk packed cable clamp per inner cartons, 5 inner cartons per master carton (400 pcs per master carton)

Accessory


- ☑ No accessories
 - Screws and Nuts

- ☐ Back fastener plate
- □ Other




Assembly Instructions


(1)	Thread the cable through the boot and the
	waterproof cable clamp.

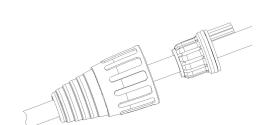

(2) Assemble the cable with RJ45



(3) Push the assembled cable clamp and RJ45 into the housing

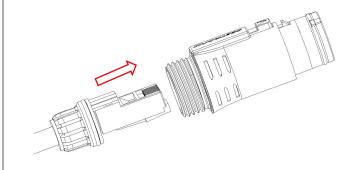

(4) After assembly of the cable clamp, RJ45 and housing, tighten the boot in a clockwise direction

