

AURA-4B900

COMMERCIAL AMPLIFIERS

Multichannel LoZ & HiZ Amplifier



PRODUCT OVERVIEW

AURA-4B900 is a multichannel 4x900 W RMS @4 Ω , high efficiency amplifier (class D). Compatibility with both Low and Hi impedance configurations and supporting dual or bridge mode (@4/8 Ω). AURA Series are built with the highest robustness for long lasting performances with special power supply circuitry designed for optimized electrical consumption with fan cooling system. AURA Series also features the possibility of linking channels to the first input by selecting it on the rear panel, as well as auto stand-by, overload and thermal protection, PFC and anti-clipping system. The front panel volume knobs can be locked using rear panel switches for added security.

KEY FEATURES

- 4 analogue audio inputs and 4 x900 WRMS @4 Ω powered audio outputs.
- Low (2, 4 and 8 Ω) and high impedance (70/100V) compatibility via rear panel switch.
- Supports dual or bridge mode (@4/8 Ω).
- Euroblock input and output connectors.
- Euroblock connectors with anti-pulling locking system.
- Link to input 1 available.
- The front panel volume control knobs can be locked using the rear panel switches for added security.
- High efficiency (Class D).
- Auto Standby function.
- Fan cooling.
- Thermal protection.
- Overload protection.
- Anti-clip system.

APPLICATIONS

- Leisure
- Hospitality
- Education
- Corporate
- Sports & Wellness
- Retail

TECHNICAL SPECIFICATIONS

AURA-4B900

CHANNELS	
Number of Outputs channels	4
Output connection type	2-pin Euroblock. Pitch: 7,62 mm
Number of Inputs channels	4
Input connection type	3-pin Euroblock, balanced, pitch 3,5 mm
Input configuration	Input link to CH1 selector per input
OUTPUT POWER All channels driven @1kHz @CF9dB @ 1%THD	
Max output power @ 8 Ω	450W
Max output power @ 4 Ω	900W
Max output power @ 2 Ω	1000W
Max output power @ 4 Ω bridge mode	2000W
Max output power @ 8 Ω bridge mode	1600W
Max output power @ 100V	900W
Max output power @ 70V	900W
OUTPUT POWER Single channel driven @1kHz @CF9dB @ 1%THD	
Max output power @ 8 Ω	450W
Max output power @ 4 Ω	900W
Max output power @ 2 Ω	1200W
Max output power @ 4 Ω bridge mode	2000W
Max output power @ 8 Ω bridge mode	1600W
Max output power @ 100V	900W
Max output power @ 70V	900W
SIGNAL	
Voltage gain	34 dB
Input sensitivity	0 dBV 2,21 dBu 1 Vrms
Input impedance	20k Ω balanced
Max input level	+18dBV 20,21 dBu
Frequency response	15Hz - 30kHz
THD + Noise	<0,01%
SNR	100dBA
Crosstalk	>70dB
CMRR	> 55 Typ
Damping Factor	>150
ELECTRICAL	
Power supply	Universal, regulated SMPS with PFC
AC mains requirement	100-240 V @ 50-60Hz ($\pm$ 10%)
Power factor correction	> 0,95
AC mains connector	IEC C14 inlet

POWER & HEAT @230VAC

1/4 POWER, @ 4Ω (all channels driven)

Power	1129 W 1189 VA
Current Draw	5,37 Arms
Thermal Loss	196,9 kcal/h 781,6 BTU/h

1/8 POWER, @ 4Ω (all channels driven)

Power	637,6 W 689 VA
Current Draw	3,05 Arms
Thermal Loss	161,3 kcal/h 640,3 BTU/h

IDLE (all channels driven)

Power	97,4 W 161 VA
Current Draw	0,69 Arms
Thermal Loss	83,8 kcal/h 332,4 BTU/h

SLEEP MODE (all channels driven)

Power	2,3 W 80,9 VA
Current Draw	0,35 Arms
Thermal Loss	2,01 kcal/h 7,8 BTU/h

POWER & HEAT @120VAC

1/4 POWER, @ 4Ω (all channels driven)

Power	1114,01 W 1129 VA
Current Draw	10.17 Arms
Thermal Loss	184,01kcal/h 730,4 BTU/h

1/8 POWER, @ 4Ω (all channels driven)

Power	657,3 W 671 VA
Current Draw	5,95 Arms
Thermal Loss	178,3 kcal/h 707,5 BTU/h

IDLE (all channels driven)

Power	100,7 W 117 VA
Current Draw	1,03 Arms
Thermal Loss	86,6 kcal/h 343,7 BTU/h

SLEEP MODE (all channels driven)


Power	1,5 W 24,01 VA
Current Draw	0,2 Arms
Thermal Loss	1,2 kcal/h 4,9 BTU/h

TECHNOLOGIES	
Amplification technology	Class D Transformer isolated output
Energy saving	Auto standby function selectable
Efficiency	80%
Cooling	2 fans
Maximum fan noise	57 dBA
PROTECTIONS	
DC protection	Yes
HF protection	Yes
Short-circuit protection	Yes
Clip limiter	Yes
Thermal protection	Yes
LOCAL CONTROL	
Attenuators	Front panel knobs per channel VOL (default)/BYPASS option
Output mode settings	Back panel Dipswitch by pairs of channels DUAL/BRIDGE LoZ/70V/100V
RUN/SLEEP mode	Auto standby function Front panel button
Power ON/OFF	Front panel switch
MONITORING	
Signal Present	SIGNAL LED (Green) per channel
Clipping	CLIP LED (Red) per channel
Protect	PROT LED (Red) by pairs of channels
Standby	AUTO STANDBY ON/OFF LED (Green) per unit
Standby / Mute	AUTO STANDBY (Orange) by pairs of channels
Thermal	TH LED (Orange) by pairs of channels
On	ON LED (Green) per unit
Link	LINK LED (White) per channel
PHYSICAL	
Operating temperature	Min:-10° ; 14° C Max: 50° ; 122° F
Operating humidity	5 - 85% RH, non-condensing
Storage temperature	Min:-10° ; 14° C Max: 50° ; 122° F
Storage humidity	5 - 85% RH, non-condensing
Including accessories	1x EU & IEC power cords, UK,US & CN plug adapters, 4x Desktop feet, 1x Rack 19" installation hardware, 6x Euroblock connectors (4x 3-pin blue for inputs and 2x 4-pin green for outputs), 2x Euroblock jumper.
Dimensions (WxHxD)	484 x 44 x 411.6 mm / 19 x 1,73 x 16.20 in
Weight	7.7 kg / 16.98 lb
Shipping dimensions (WxHxD)	590 x 80 x 590 mm / 23.23 x 3.15 x 23.23 in.
Shipping weight	10.5 kg / 23.15 lb

MECHANICAL DIAGRAM



Ecler AURA-4B900 Mechanical Diagram

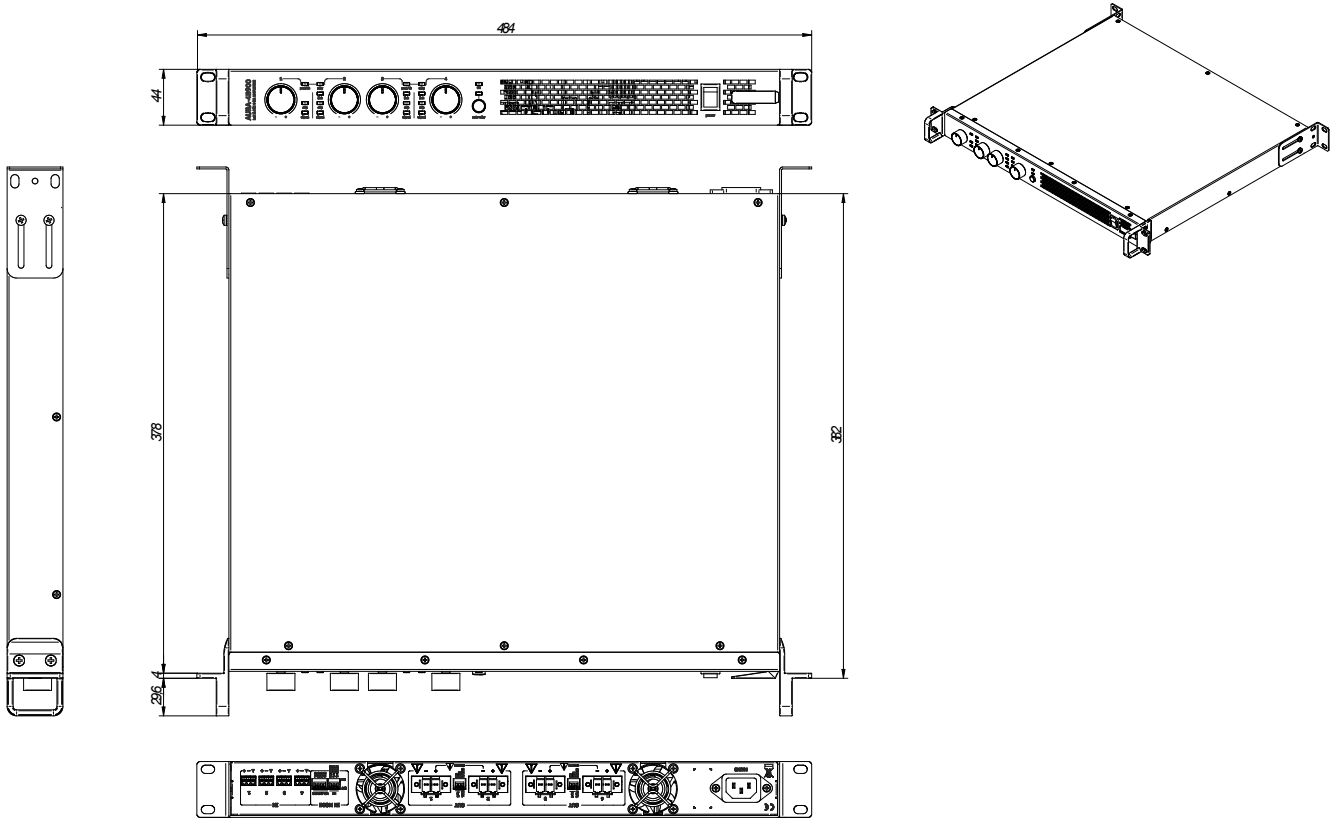

All the measurements are in mm

61-1165-0100

www.ecler.com

A & E SPECIFICATIONS

The Amplifier shall be able to work both in Low Impedance(@2/4/8 Ω) and High Impedance(70/100V), Selectable through a switch in the rear panel, containing two independent controllable amplifier channels with a 900W @ 4 Ω maximum output power per channel and supporting dual or bridge mode (@4/8 Ω) The construction shall be transformer-less, using Class-D Amplifier technology and powered by a universal, regulated SMPS with PFC power supply. Each channel shall have integrated circuitry to protect against short-circuits or mismatched loads and over-heating. Additionally, the load shall be protected against DC faults and a clip limiter shall automatically reduce the input gain at onset of distortion.

The front panel shall contain an AC power switch, a power on indicator LED, an Auto Standby button and Auto Standby LED. Each channel should have a level knob, a signal LED, a clip LED and a link LED, moreover protect and thermal LEDs for each pair of channels. The front panel knobs should be able to be disabled by means of the VOL Bypass switch on the rear panel. Auto Standby threshold value is -50 dB. The possibility to link the channels to input 1 shall be available through a switch on the rear panel.

All connections shall be made on the rear panel of the unit. The output connections must be fitted with terminal block connectors. The amplifier shall operate on a 100-240V AC - 50/60 Hz mains network and shall be equipped with a removable power cord having a standard Shuko (CEE 7/7) AC plug. The connector on the amplifier chassis shall be a fused IEC C14 type. The amplifier chassis shall be a 1UR steel constructed 19" housing. Depth from mounting surface to rear supports shall be 411.6mm and the weight shall not exceed 7.7 Kg.

The amplifier shall be the ECLER AURA-4B900.



All product characteristics are subject to variation due to production tolerances. **NEEC AUDIO BARCELONA S.L.** reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.

For technical queries contact your supplier, distributor or complete the contact form on our website, in [Support / Technical requests](#).

Motors, 166-168 - 08038 Barcelona - Spain | (+34) 932238403 | information@ecler.com | www.ecler.com