

HOLLYVOX


G51

Unparalleled Communication Clarity

Introducing Hollyland's Hollyvox G51, the ultimate full-duplex wireless intercom system recognized for its unparalleled professional performance. With advanced dual-mic Environmental Noise Cancellation (ENC) technology, this professional full-duplex wireless intercom system ensures unparalleled communication clarity, ideal for production teams working in loud environments. The ergonomic headset design offers optimal stability and comfort, allowing you to stay focused on your tasks. With an impressive LOS range of 1,300ft (400m), it is the ideal choice for small- and medium-scale events such as stage performances and sports events, enabling seamless team coordination through extensive and interference-free communication.



Dual-Mic ENC



1,300ft (400m)
LOS Range



Group
Communication



Expandable
Cascade Connection



1.9GHz Frequency



Cozy
Headset Fit




Flexible
Configuration & Upgrade




Extended
Battery Life

I Multiple-Device Cascade Connection


Two-System Cascade Connection

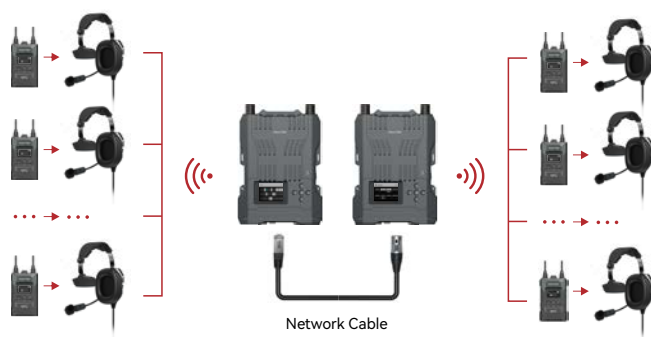

Three-System Cascade Connection

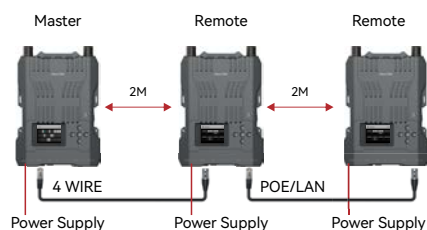

Four-System Cascade Connection

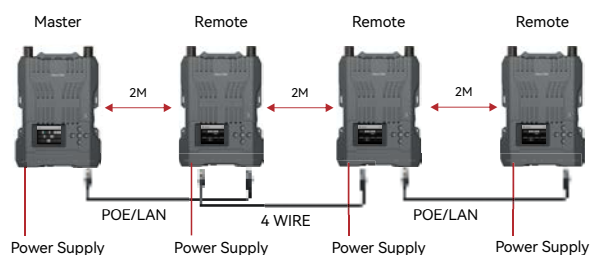


Connection to Other Hollyland Intercom Systems via the 4-Wire Interface — Solidcom C1 Pro



Connection to 2-Wire and 4-Wire Audio Systems via the 2-Wire Interface and 4-Wire Interface



Connection to Hollyland's Walkie-Talkie Converter

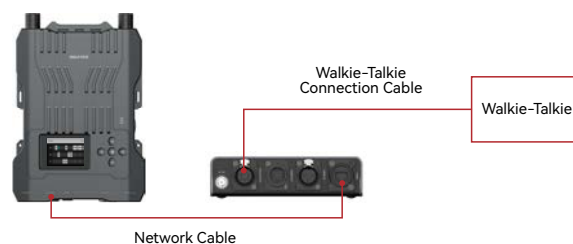

I Specifications

	Base Station	Beltpack
Interface	POE interface (RJ45) Power supply interface (RJ45) 4-wire audio interface 2-wire audio interface USB interface	3.5mm headset interface 0B10 headset interface USB-C interface
Power Supply	POE power supply NP-F battery	1500mAh lithium polymer battery
Frequency Response	150 Hz–7 kHz	ENC OFF: 200 Hz–7 kHz (fluctuation range: ±6dB) ENC ON: 200 Hz–7 kHz (fluctuation range: ±10dB)
Signal-to-Noise Ratio	>55dB	60dB±2
Power Consumption	<3W	<0.65W
Dimensions	(L x W x H): 255.5mm x 180.4mm x 48.5mm (10" x 7.1" x 1.9")	(L x W x H): 105mm x 65mm x 22.4mm (4.13" x 2.56" x 0.88")
Net Weight	Approx. 1560g (55oz)	Approx. 200g (7oz)
ENC Level	/	20dB
Distortion	<1%	
LOS Range	1,300ft (400m)	
Frequency Band	1.9GHz	
Modulation Mode	GFSK	
TX Power	<21dBm	
RX Sensitivity	≤-93dBm	
Bandwidth	1.728MHz	
Temperature Range	0°C to 45°C (working condition) -20°C to 60°C (storage condition)	