

PROFESSIONAL STUDIO & DJ HEADPHONE

JTS[®]
JTS PROFESSIONAL CO., LTD.

Features

- The HP-525 is specially designed for professional monitoring, e.g. sound reinforcement, studio monitoring and various sound testing.
- Audiophile quality "close-ear", dynamic stereo headphones.
- Super thin 38 mm diaphragm driver offers wide dynamic range and frequency response.
- Neodymium magnet having a high flux density ensures high sensitivity.
- Flexible ear pads and adjustable headband allow the best comfortable wear.
- Detachable phone adaptor plug is available for 1/4" and 1/8" application.
- One ear listening is ideal for DJs.



Use Instruction

1. Insert headphone plug to the headphones jack of mixer, amplifier, CD player etc. As soon as 1/8" plug is demanded, please release the 1/4" adaptor plug to submit. (Figure 1)
2. Put on headphone directly and make ears to be covered absolutely by the ear pads. Before this action, please make sure correct channels were chosen exactly. The letter R and L on the headband indicate the "right" and "left" channels respectively. (Figure 2)
3. Adjust the slide bar to the position that suits your best. (Figure 3)

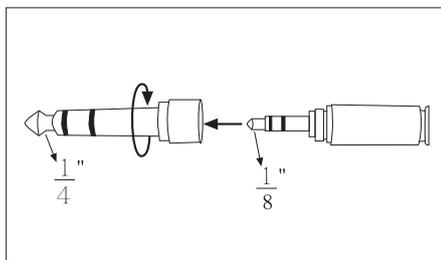


Figure 1



Figure 2

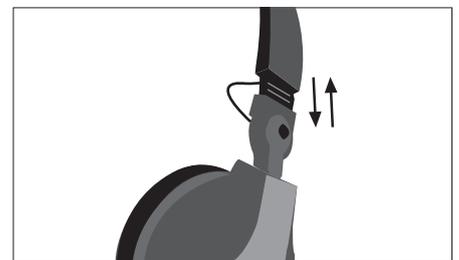


Figure 3

Caution

- Keep watches or personal credit cards using magnetic coding away from the headphones to prevent possible damage by the headphones' magnetic.
- Avoid listening with the headphones at a loud volume that might affect your hearing after extended play.

Specifications

Driver Unit: 38 mm dia, dynamic type.

Frequency response: 20 ~ 20,000Hz.

Impedance: 70Ω.

Sensitivity (at 1 kHz): 106 dB/mW

Input connector: 1/8" gold-plated stereo phone plug and 1/4" phone adaptor.

Power handling capacity: 1W

Net weight: 220 grams (5.3oz) excluding cable



JTS[®] PROFESSIONAL CO., LTD.
No. 148, 9th Industry Road, Ta-Li Industrial Park,
Taichung City, Taiwan, R.O.C.
Tel: 886-4-24938803 Fax: 886-4-24914890
E-mail: jts@jts.com.tw
www.jts.com.tw



59010-057-04