

ACT-58T ISM 5 GHz Digital Bodypack Transmitter


Key Features

- Miniature, sturdy plastic compact housing design for easy to wear. An adjustable belt clip allows wearing the transmitter in the up or down position.
- Unique battery cover allows easy access to operate buttons and the lock device prevents accidental operation.
- World's first ACT™ function provides precise and rapid frequency sync to the receiver.
- The mini XLR connector accepts either a screw-lock or a TA4F quick-lock plug.



Microphone Capsules

| | |
|-------------------------|---------------------------------------------------------------|
| MU-23 | Omni-directional Headworn Microphone (beige, fixed connector) |
| MU-23d | Omni-directional Headworn Microphone (beige, detachable cont) |
| MU-210 | Uni-directional Headworn Microphone (beige, fixed connector) |
| MU-210d | Uni-directional Headworn Microphone (beige, detachable cont.) |
| MU-53L MU-53LS | Uni-directional Lavalier Microphone (black beige) |
| MU-55L MU-55LS | Omni-directional Lavalier Microphone (black beige) |
| MU-53HN | Uni-directional Headworn Microphone (black beige) |
| MU-55HN | Omni-directional Headworn Microphone (black beige) |
| VM-10L | Violin/Viola Microphone Set |
| VM-10C | Cello Microphone Set |
| VM-10D | Double Bass Microphone Set |
| CM-10E | Erhu Microphone Set |

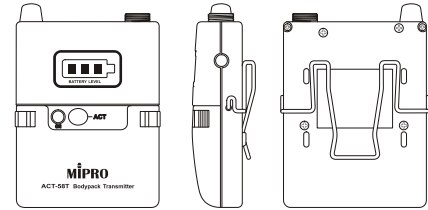

Accessories

| | |
|---------------|------------------------------------|
| ASP-30 | Neoprene Sports Pouch |
| MJ-70 | Remote Mute Switch |
| MU-40G | Instrument Cable |
| TC-18 | Transmitter Shielding Storage Case |

Technical Specifications

| | |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency Range | ISM 5.8 GHz |
| Modulation Type | Digital |
| RF Output Power | 20 mW (country dependent) |
| Mic Capsule Modules | Lavalier: MU-53L / MU-55L; Headworn: MU-13 / MU-23 / MU-210 / MU-53HN / MU-55HN; Instrument: VM-10L / VM-10C / VM-10D / CM-10E |
| Max. Audio Input | 6.5 dBV |
| Battery Meter | 3 LEDs light in green to indicate battery status and turn to red to indicate low battery; after 2 hours power will automatically be shut down. |
| Dimensions | 63 × 82 × 22 mm (W × H × D) |
| Net Weight | Approx. 73 g |
| Battery | 2 × AA alkaline |



MIPRO Electronics Co., Ltd

Headquarters: 814 Beigang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw