
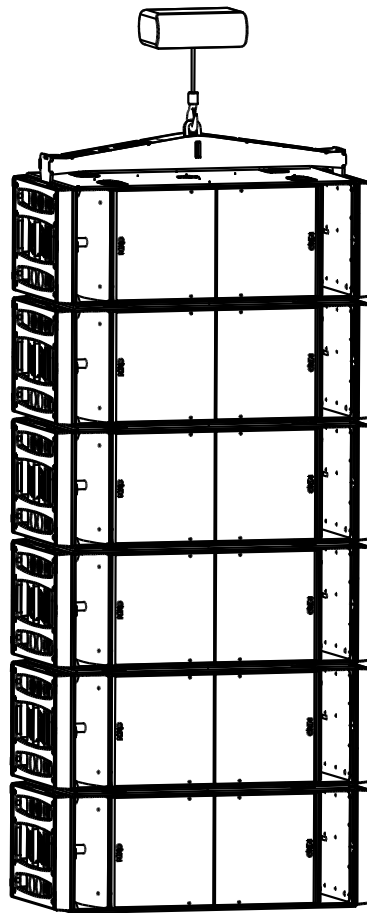
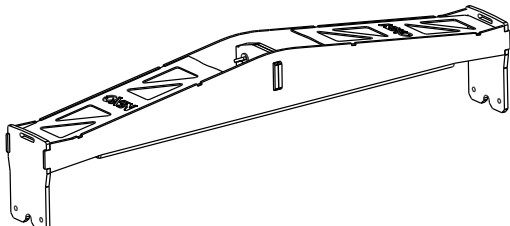



RS18 BUMPER




Maximum allowed RS18 Quantity to be flown is 12

Contents:

<p>X1</p> 	<p>X2 (Shackle 3.25T)</p> 	<p>X4 (10x25)</p> 
--	---	---


Weight: 38 kg / 84 lb

Dimensions:

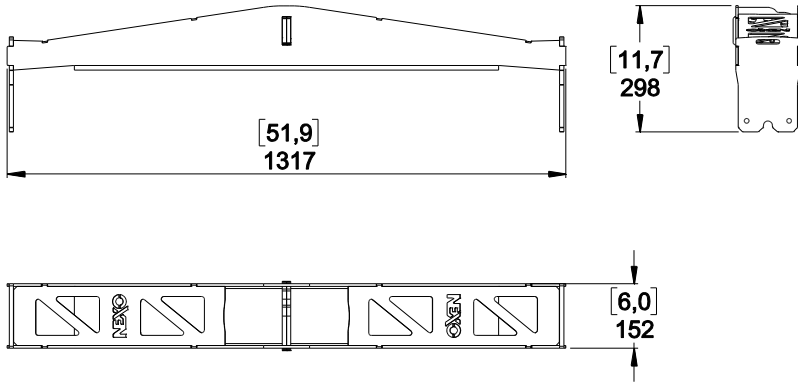

Connecting first RS18 to RST-BUMPER18:

- Connect bumper to first RS18 flying system link plates using 4 10x25mm quick release pins;
- Ensure the 4 quick release pins are properly locked;
- Connect hoist hook to bumper axis;

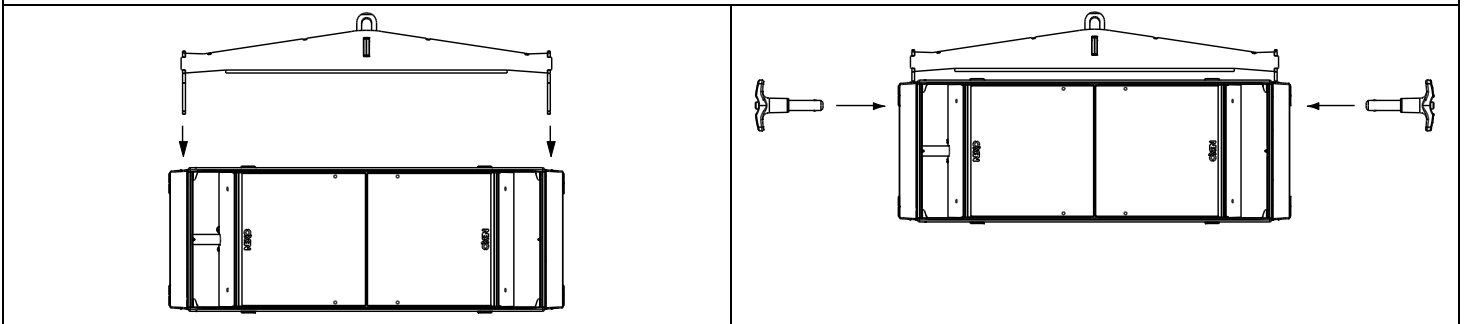

Rigging point for OMNI mode Grids same side	Rigging point for CARDIO mode Grids alternate side	Quick release pin 10x25mm storage

!! Secure bumper with secondary safety shackle

- NEXO cannot accept responsibility for accidents caused by any factor other than defects in this product itself.
- Please check the web site nexo-sa.com for the latest update.



nexo-sa.com
ZA du Pre de la Dame Jeanne
60128 PLAILLY - France

- Read this document before using.
- Keep this document.
- Observe all warnings and cautions.

