


CONTENTS

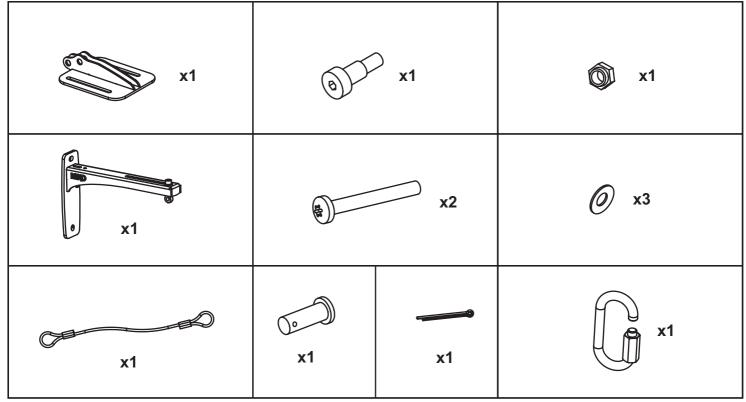



### **Adapter Mounting**


1 - Take away 2 screws of origin and use the 2 screws and the 2 washers provided to fix the adapter. Attention , please do not push on the two screws while screwing them , so as to avoid disengaging the bolt that is inside the cabinet.


2 - Choose 1 of the 4 mounting positions- in function of the desired tilt.


#### FASTENERS





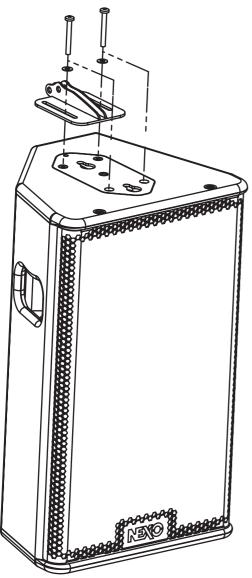




















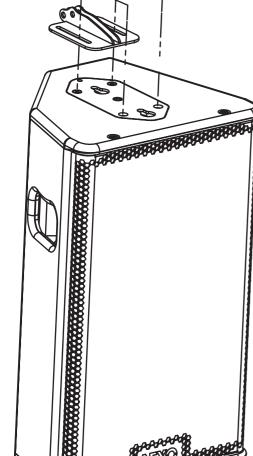









### Adapter / Arm Mounting

Tighten well to cancel any float between the arm and adapter.

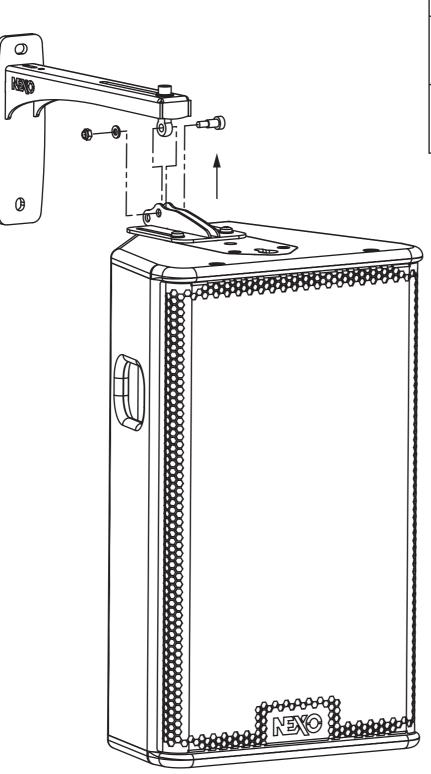





Safety Device Mounting

FASTENERS

