
PNI-P15TOL18


DP5578 – 01b - DI



P15 Under L18 Rigging System

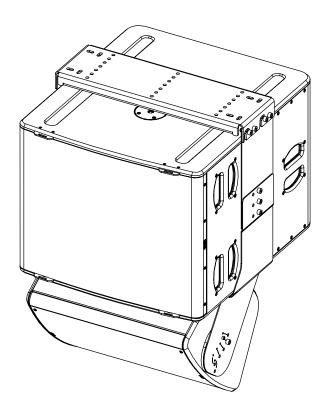

Contents:

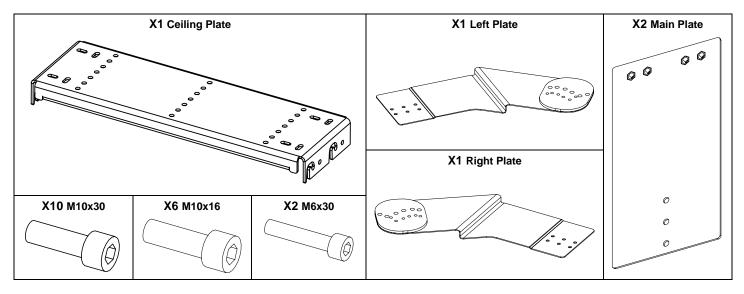


Weight: 21 kg / 46.2 lb



- Read this document before using.
- Keep this document.
- Observe all warnings and cautions.



Dimensions:

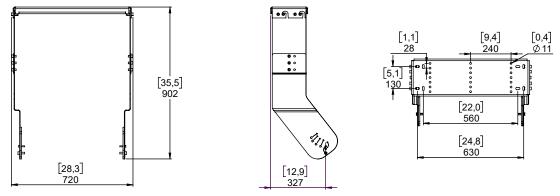


For fixation, you have the choice between M8 and M10

WARNINGS

Ensure that the mounting location and fasteners can support at least 4 times the weight of all the installed cabinets, auxiliary equipment and cables.

Use only the provided screws (thread lock coated) and accessories.

Implementation of a L18

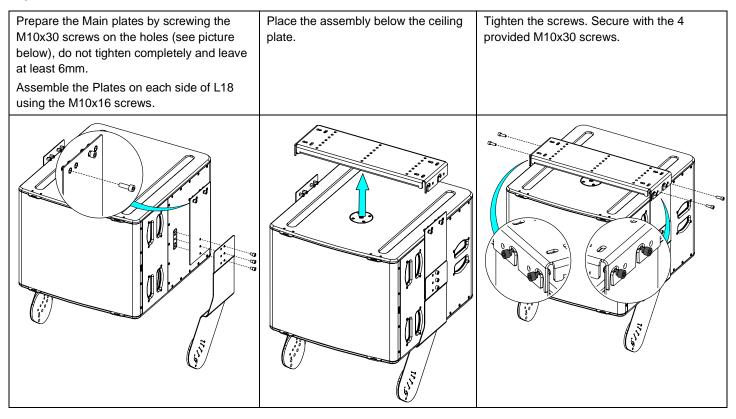




- Read this document before using.
- Keep this document.

- Observe all warnings and cautions.



Place P15 between the plates, position at the chosen angle, fasten with M10x30 screws and secure with M6x30 screws.

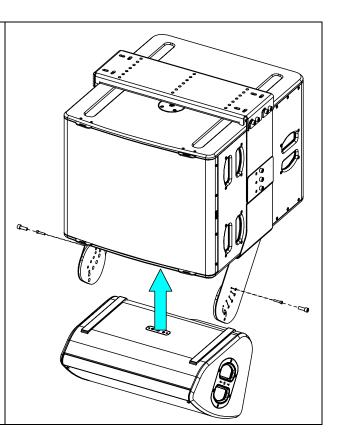

PNI-P15TOL18 frame tilt

P15	Holes 1	Holes 2	Holes 3	Holes 4	Holes 5	Holes 6	Holes 7
0°	3,0°	-0,5°	-4,0°	-7,5°	-11,0°	-14,0°	-17,5°
-15°	3,0°	-0,5°	-4,0°	-7,5°	-11,0°	-14,0°	-17,5°
-25°	4,0°	0,5°	-3,0°	-6,5°	-10,0°	-13,5°	-16,5°
-35°	5,0°	1,5°	-2,5°	-6,0°	-9,0°	-12,5°	-16,0°
-45°	5,5°	2,0°	-1,5°	-5,0°	-8,5°	-12,0°	-15,5°
-55°	5,5°	2,0°	-1,5°	-5,0°	-8,5°	-12,0°	-15,5°

Note 1 : Holes 1 are those toward F.O.H.

Note 2 : All angles measurements have been done without cables weight.

Note 3 : Angles are in relation to Horizontal position (0°)




- Read this document before using.

Keep this document.Observe all warnings and cautions.



Standard inclinations :

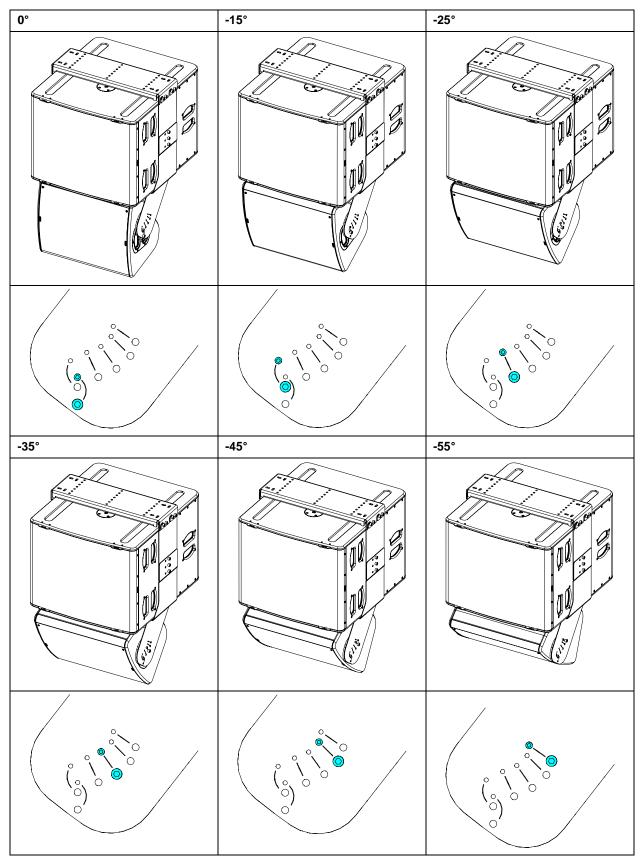

NEXO cannot accept responsibility for accidents caused by any factor other than defects in this product itself. Please check the web site <u>nexo-sa.com</u> for the latest update.



Read this document before using.Keep this document.Observe all warnings and cautions.

