






42236

Showtec Octostrip FLEX Set - 1 m*Set of 8x 27 W Octostrips +
controller*

EAN: 8717748579300

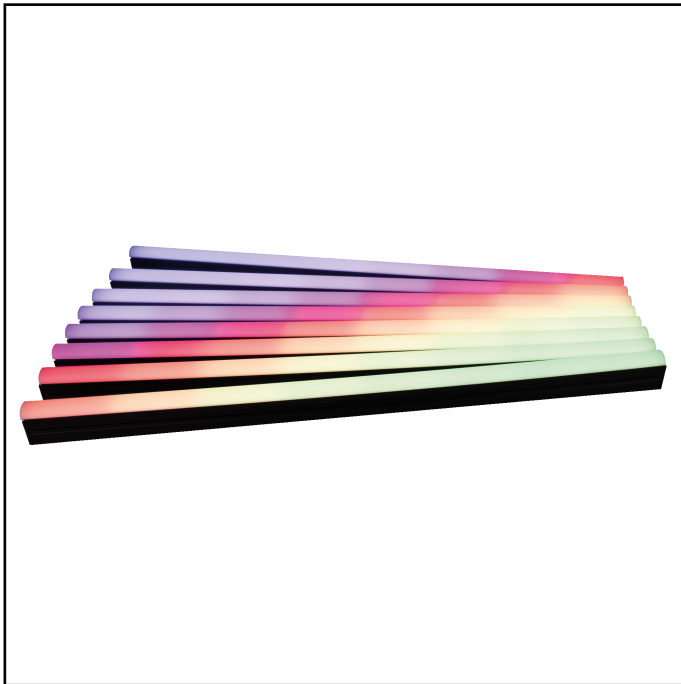

The Showtec Octostrip FLEX Set - 1 m is an IP65-rated set of 8 RGBW LED strips and a dedicated controller. Each LED strip has its own separate 1-metre-long housing with 8 controllable LED sections (56 LEDs in total) and a maximum power of 27 watts. The controller supports Art-Net and DMX, but also has stand-alone modes with built-in colour presets and colour sequences. All units have a robust aluminium housing that in case of the LED strip also helps with convection cooling of the LEDs.

The set is supplied with frosted interchangeable white and black diffusers that provide a uniform light. The white diffusers block the least amount of light. The black diffusers allow the Octostrip to be virtually invisible on a black background when switched off. Dedicated 4x 2.5 m and 4x 5 m cables with control signals and power are included. Additional dedicated cables of various lengths are available separately (maximum length allowed: 30 m).

Special features:

- 8x 100 cm strips with 8 RGBW sections
- IP65 rated enclosures
- DMX, Art-Net and stand-alone modes
- Diffusers and cables included

Specifications:

Source

Light Source Type	LED
Light Source Power	27 W
LED Colour Type	RGBW

Dynamic Effects

Dimmer	0-100 %
Strobe	0-20 Hz

Electrical Specifications and Connections

Power Supply	100-240 V AC 50/60 Hz
Power Consumption	238 W
Power Connector In	Power Pro True
Power Connector Out	Power Pro True
DMX Connector	XLR 5P In/Out
DMX Connector In	XLR 5P
DMX Connector Out	XLR 5P
Data Connector	etherCON In/Out
Data Connector In	etherCON
Data Connector Out	etherCON

Mechanical Specifications

Height (mm)	66 mm
Width (mm)	35 mm
Length (mm)	1007 mm
Controller Height	103 mm
Controller Width	171 mm
Controller Depth	372 mm
Weight	1.6 kg
Controller Weight	3 kg
IP Rating	IP65
Housing	Aluminium
Colour	Black

Product Properties

Cooling	Forced Convection
---------	-------------------

Rigging

Mounting Options	Clamp / Quick-Lock / Sliding Profile
Safety Attachment	Yes

Thermal Specifications

Maximum Ambient Temperature	40°C
Minimum Ambient Temperature	-5°C

Included Items

Included Cables	Flex Cable 2,5M / Flex Cable 5M / Power Pro Cable
Included Accessories	Controller

Included Rigging	1x Quick-Lock Bracket
Control and Programming	
Control Mode	Art-Net / Auto / DMX / Manual / RDM / sACN
DMX Channels	9 / 16 / 30 / 32 / 58 / 128 / 192 / 256
Protocols	Art-Net / DMX / sACN
Display	OLED
Zone Control (Sections)	64