

Headset Microphone


CM-501Hi

Condenser Lavalier Microphone

The CM-501Hi deploys a high sensitivity capsule with unidirectional pick up pattern. It provides maximum gain before feedback. Wide frequency response and dynamic range assure excellent sound reproduction.

The latest clip set, CLP-258, provides versatile application. Single and dual microphone pick up are at your choice. CLP-258 assures optimal picking up for different dressings.

- Uni-direction for high-quality voice pick-up.
- Optimal gain before feedback.
- Wide dynamic range and frequency response for excellent sound reinforcement.
- Small size for minimum visibility.
- Together with clip set CLP-258 for easy attaching to a tie, lapel, dress etc.

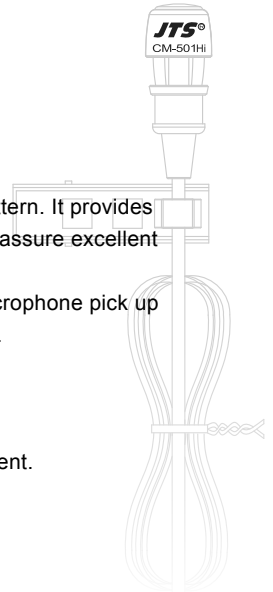

Model No.	CM-501Hi
Type	Uni-directional Condenser
Frequency Response	100 to 15,000Hz
Polar Pattern	Cardioid
Output Level(at 1,000Hz)	-54±3 dB* (2mV) *0dB=1V /μbar
Impedance	Rated impedance is 3.7kΩ
Max. SPL for 1% THD	115dB
Standard Operating Voltage	5Vdc
Operation Voltage Range	3~10 Vdc
Current consumption	Max. 0.5mA
Output Connector	TA4F
Net Weight	21.5grams
Available Color	Beige / Black



完成日	20190306	發稿日	20190306	再完稿		樣品確認	20190322
-----	----------	-----	----------	-----	--	------	----------

得琦電子股份有限公司 TEL: 04-24938803 FAX: 04-24914890 MO--

廠商: SX Date: 20190306

料號: 59010-540 From: E-mail: junyi@jts.com.tw 張君怡分機206

品名: A5說明書 JTS CM-501HI(120磅雪銅) -01版

新稿如圖

成品	
----	--

註解	顏色	單色	尺寸	A5 單面	材質	120P 雪銅紙	發稿方式	e-mail
----	----	----	----	-------	----	----------	------	--------

設計	君怡	董事長 特助		副總		營業		研發		企劃	
----	----	-----------	--	----	--	----	--	----	--	----	--