



Hassle-free, cloud-managed routing for integrators with the Insight Managed Pro Router

The PR460X 10G/Multi-Gigabit Dual WAN Pro Router with Insight Remote Cloud Management makes it easy to connect and manage internet traffic between wired devices within a secure network.

Developed for residential and commercial applications, this cuttingedge router is designed to meet high-end client needs who require lightning-fast speeds and exceptional connectivity with remote management capabilities. The Dual WAN functionality includes failover protection, ensuring uninterrupted internet connectivity for critical applications and services. The sleek, updated form factor of the router is designed for mounting with the ports in the rear, but can be installed reversed with the included rack ears.

The PR460X includes a 4-year Insight Remote Cloud Management subscription, which allows for a simple and stress-free way to remotely configure and manage your network from any location.



Highlights

Intelligent Router

Providing all the routing and network segmentation features that a router must have, the NETGEAR PR460X will be the backbone of any integrator project.

10G/Multi-Gigabit LAN/WAN ports keep your data moving at top speed. VPN features, such as IPSec VPN and Open VPN, provide secure connection to a remote network. With Network Address Translation (NAT) routing, IT managers can access your client's broadband connection at the same time.

Leverage up to 32 VLANs to separate the network into smaller groups for more secure and efficient use of network resources. Simplify network administration with up to 32 DHCP servers assigning IP addresses automatically.

Remote Management

The NETGEAR Insight Remote
Management platform offers visibility and access to the routing features from a single pane of glass. Register, configure, manage and monitor your router with just a few taps from your Insight mobile App or web portal.

Business Grade

The quiet 19-inch rack-mountable metal unit is backed by the industry's best-inclass 5-year hardware warranty, 90-day free technical support, and 5-year next business day replacement.

AV-over-IP management

The NETGEAR Engage Controller removes the complexity from network configuration and management in AV-over-IP installations using PR460X router, WiFi7 Access Points, M4250, M4300, M4350, and M4500 switches.

Simply activate NETGEAR Insight Cloud management to manage your network. Anytime. Anywhere.

Activating NETGEAR Insight Cloud management enables users to experience simpler configuration and deployment from anywhere using the NETGEAR Insight app from mobile devices or the Insight Cloud portal from any device with a web browser.

Unique advanced management features of Insight managed devices include:

- Remote monitoring and management with performance dashboards and troubleshooting features including remote reboot, port
 and PoE advanced configuration including remote enable/disable/power-cycle, PoE scheduling, and firmware updates with autoschedule mode
- Single pane-of-glass multi-device, multi-network, and multi-site remote monitoring and notifications with the NETGEAR Insight app
- Full-fledged local or remote access for configuration, management, and monitoring on a larger display using your tablet, laptop, or desktop computer through the NETGEAR Insight Cloud portal
- Configurable in-app and email alerts and notifications
- Auto-join and configure (zero-touch provisioning) for additional Insight managed devices added to the network
- Centralized network configuration (policies) across Insight managed switches, and access points for VLANs, ACLs, QoS, LAGs, etc.
- Cloud-based network administration, monitoring, and firmware management

Add the PR460X Router to your AV Network with NETGEAR Engage™ Controller

Engage brings a new, easier way to configure AV Networks. Engage Version 2 adds the ability to onboard a PR460X router and select wireless access points extending the ease of use previously only available to NETGEAR AV switches.

General Engage Features

- AV User Interface: Higher visibility for features AV networks need most
- Quick Configurations: Unique, port-based configuration profiles tested by the endpoint partner manufacturers
- Auto Discovery: Automatically detect all NETGEAR AV switches on your network
- Easy Updates: Upgrade firmware on multiple devices at once during onboarding process
- Single Pane of Glass: Centralized workflow to deploy configurations to all NETGEAR AV devices across your entire network
- Visual Aid: Network topology view lets you visualize all managed NETGEAR AV devices
- Exclusive Features: Easily leverage breakthrough features like NETGEAR IGMP Plus™, Auto-LAG, and Auto-Trunk
- No Installation Required: Lightweight, portable application you can run it from a USB thumb drive (Win/Mac)

Router Features with Engage

- DHCP Hosting per VLAN/AV Profile: The DHCP server can be hosted on the router for each VLAN/AV profile, simplifying network management.
- One-Click Internet Access: Allows easy propagation of internet connectivity to each VLAN/AV profile with a single click.
- One-Click mDNS Gateway: Enable Bonjour, Chromecast, Spotify, and other mDNS traffic to be shared between VLANs.
- Auto-Trunk for Zero Configuration: Automatic VLAN trunking with no setup on the switch where the router is connected, streamlining deployment and reducing setup time.

For more information about the free NETGEAR Engage Controller please visit: https://www.netgear.com/engage




Features and Benefits

High performance hardware	10G/Multi-Gigabit throughput with 1x2.5G WAN, 1x10G/Multi-Gigabit WAN/LAN configurable 3x2.5G LAN and 1x10G SFP+ LAN port.
WAN-to-LAN Throughput	When using WAN2 port - 10Gbps max WAN with 17.5Gbps max LAN When using WAN1 port only - 2.5Gbps max WAN with 27.5Gbps max LAN
Primary and secondary internet connections	Dual WAN ports for failover accommodating two internet connections to maintain a reliable link. The first connection functions as the primary and the other as a backup.
Leverage up to 32 VLANs	Separate the network into smaller groups for more secure and efficient use of network resources.
Supports up to 32 DHCP servers	Allows for automatic assignment of IP addresses, simplifying network administration.
Firewall protection against malicious incoming traffic	Prevents unauthorized access to the network and monitors the communications between the network and the outside world with support up to 250,000 concurrent connections.
Dual WAN Load Balancing	Distribute network traffic across two internet connections.
NETGEAR Insight Remote/Cloud Management	Instant discovery, configuration, and management of your network and Pro Router. Free 4-year subscription included.
NETGEAR Engage Controller for AV-over-IP	A free, portable app for Windows, and MacOS, the controller automatically detects all the compatible devices permitting effortless firmware upgrades, profile configurations, and much more.
Versatile rackmount design	Reverse mounting rack ears included for front-facing or rear-facing ports as desired for a clean or traditional look.
IPSec Site-to-Site VPN	Provides up to 30 VPN tunnels for secure multi-site connections.
IPSec Client-to-Site VPN	Provides up to 100 client device connections (max total 100 combined with IPSec Site-to-Site)
Open VPN Client-to-Site	Provides up to 100 client device connections.
WireGuard	Fast and encrypted VPN, providing up to 100 client device connections.
Dynamic DNS	Updates DNS records automatically to reflect WAN IP address change.
mDNS Gateway	Allows services such as printer, AppleTV and Chromecast TV, to traverse across VLAN networks.
QoS (Smart Queue Management)	Mitigates upload/download latency per WAN port.
LLDP	Provides a direct line of communication between two systems over the same link.
Link Aggregation Group (LAG)	Combine multiple Ethernet links into a single logical link between two networked devices.
Third Party Support	Domotz network monitoring



Target Application

Professional Residential Installer - PR460X

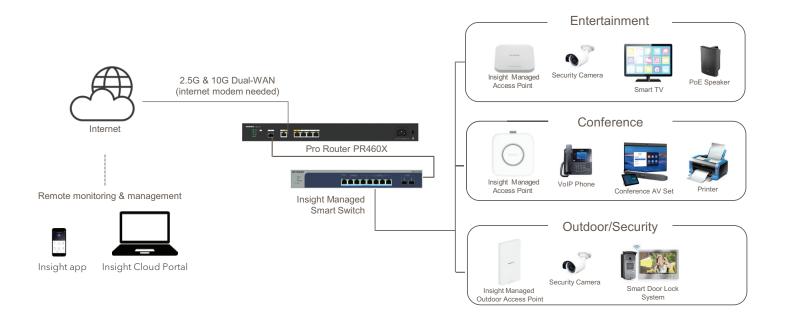



Technical Specifications

FEATURES	PI	R460X	
Connectivity			
Gigabit Ports WAN/LAN	1 x 2.5G/1 3 x 2.5G/1	oper (Configurable LAN/WAN) G RJ-45 (WAN) IG RJ-45 (LAN) IG SFP+ (LAN)	
Dual WAN Failover	Yes		
Dual WAN Load Balancing		Yes	
DMZ Interfaces (Configurable)		Yes	
Performance			
LAN-to-WAN Throughput	•	o-WAN throughput is 2.4Gbps o-WAN throughput is 9.4Gbps	
Maximum Number of VLANs		32	
Concurrent Connection Limit	60,000		
Concurrent Client Limit	2,000		
LAN-WAN BiDirectional Throughtput			
Stream	UDP BiDirectional	TCP BiDirectional	
LAN1, LAN 2, LAN 3 to WAN 2	13.88 Gbps (4.48+4.70+4.70)	13.87 Gbps (4.50+4.68+4.69)	
LAN 1 to LAN 2	4.77 Gbps	4.70 Gbps	
LAN 1 to WAN 1	4.77 Gbps	4.70 Gbps	
WAN 1 to LAN 5	4.76 Gbps	4.66 Gbps	
WAN 1 to LAN 4	4.76 Gbps	4.67 Gbps	
WAN 2 to LAN 4	18.77 Gbps	18.83 Gbps	
LAN 4 to WAN 2	18.77 Gbps	18.78 Gbps	
Security			
Firewall Functions	Firewall Traffic Rules/Scheduling, Port Forwarding, Port Triggering, Stateful Packet Inspection (SPI), Port/Service Blocking, Denial-of-service (DoS) Prevention, Stealth Mode, Block TCP Flood, Block UDP Flood, Respond To Ping on Internet Port		
VoIP SIP ALG		Yes	
Networking			
ISP Address Assignment	DHCP, Static IP Assignment, PPPoE		
NAT Modes	NAT		
Routing	Static, Dynamic, RIPv1, RIPv2		
DHCP Server		32	



Technical Specifications

Networking			
Concurrent Clients	60,000		
Concurrent Connections	2,000		
VLANs (Up to 32)	802.1Q		
Essential Networking Features	MAC Address Cloning/spoofing, NTP Support, UPnP, Auto Uplink on Switch Ports		
QoS	Smart Queue Management		
Dynamic DNS	Yes		
mDNS Gateway	Yes		
LLDP	Yes		
Link Aggregation Group (LAG)	Yes		
Third Party Support	Domotz		
VPN			
Maximum VPN Throughput	Site-to-Site 4.42 Gbps using 2.5G WAN; 8.92 Gbps using 10G WAN; Client-to-Site 500 Mbps		
Protocol	IPSec Site-to-Site, IPSec Client-to-Site, OpenVPN Client-to-Site, WireGuard		
IPsec Encryption/Authentication	3DES, AES (128, 192, 256 bit)/SHA-1, SHA-2 (256 bit), MD5		
Key Exchange	IKEv1, IKEv2, Pre-shared Key		
Access Modes	Remote access via Insight Remote Cloud Management		
Insight Cloud Management Features			
Logging	Accepted Packets, Dropped Packets Statistics, System, Source MAC filter, Session Limit, Bandwidth Limit, IPsec VPN		
Log Delivery	Insight logging		
Troubleshoot	Diagnostics Ping, DNS Lookup, Trace Route, Speed test		
Maintenance	Save/Restore Configuration, Restore to Factory Defaults, Firmware Upgrades, Display and Monitor Statistics		
AV Configurable Features with Engage Controller			
VLAN/AV Profile	Single click Internet Access, Hosted DHCP server on ProRouter		
Troubleshoot	Single click mDNS Gateway		
Auto-Trunk	Yes		



Technical Specifications

Н	lai	ď	w	aı	re
		u	**	u	•

Quad Core ARM A73 @ 2.2 GHz Processor Packet Process Engine (PPE) processors

Flash Memory/RAM 2GB DDR4/4GB eMMC

Environment: RoHS Major Regulatory Compliance Safety: CE/LVD, CSA

EMI: FCC Part 15 Class B, CE mark

Operating Temperature: 0° - 40°C (32°-104° F) **Temperatures**

Storage Temperature: -20° - 70° C (-4° - 158° F)

Operating humidity 90% maximum relative humidity, non-condensing Humidity

Storage humidity 95% maximum relative humidity, non-condensing

Electrical Specifications AC Input: 100-240V, 50/60Hz, 1.3A

Dimensions (W \times D \times H) 17.3 x 3.9 x 1.7in (440 x 100 x 43.2mm)

Weight 3.34lb (1.513kg)

Cable or DSL Broadband Modem, Internet Service,

Windows Client Device,

Internet Explorer/Firefox/Chrome/Safari Web Browser

Warranty and Support

System Requirements

Hardware Warranty* 5-year

Next Business Day Replacement 5-year

Free Technical Support* 90 Days

Category 2 ProSUPPORT OnCall** PMB0312-10000S 24x7 Service Packs PMB0332-10000S PMB0352-10000S

Insight Remote Cloud Management 4-year Insight subscription included

Package Contents

NETGEAR PR460X 10G/Multi-Gigabit Dual WAN Pro Router with Insight Cloud Management

Rack-mount kit

PR460X Rubber feet (for desktop deployment)

Power cord(s) (varies by region)

Ethernet cable Installation guide





Ordering Information

Ordering Information			
North America	PR460X-111NAS		
Europe	PR460X-111EUS		
Australia & New Zealand	PR460X-111AUS		
India	PR460X-111INS		
Japan	PR460X-111JPS		
South Korea	PR460X-111KOS		
Taiwan	PR460X-111TWS		
Hong Kong, Singapore and Middle East	PR460X-111UKS		
China	PR460X-111PRS		
Other APAC	PR460X-111PES		

NETGEAR, the NETGEAR Logo, and NETGEAR Insight are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). © 2025 NETGEAR, Inc. All rights reserved.

NETGEAR, Inc. E-mail: info@NETGEAR.com, www.NETGEAR.com

DS-PR460X-30May25

^{&#}x27;This product comes with a limited warranty that is valid only if purchased from a NETGEAR authorized reseller, and covers unmodified hardware, fans and internal power supplies - not software or external power supplies, and requires product registration at https://www.NETGEAR.com/business/registration within 90 days of purchase; see https://www.NETGEAR.com/about/warranty for details. Intended for indoor use only.

 $[\]hbox{\ensuremath{**}} The \,NETGEAR\,OnCall\,24x7\,contract\,provides\,unlimited\,phone, chat\,and\,email\,technical\,support\,for\,your\,networking\,product.$